

ARGESYS

ELEKTRONİK SANAYİ VE TİCARET A.Ş.

ASYS LIGHT

2025

www.argesys.com.tr

45
years

YASAL UYARILAR

Bu kataloga ait tüm basım ve yayım hakları Argesys Elektronik Sanayi ve Ticaret A.Ş.'ne aittir.

Bu katalogda isim hakları, içeriği, şablonu, tasarımı ve site içindeki tüm dokümanlara ait hakları saklıdır.

Katalogdaki ürün resimleri bilgi ve izim olmadan kullanılamaz veya yayınlanamaz.

Verilen tüm elektriksel değerler ölçüm değerleridir.

Lümen çıkışı ve elektriksel yük değerleri +/-10% tolerans dahilinde farklılık gösterebilir. Işık renk sıcaklık değerleri +/-150 K tolerans dahilindedir.

Bu katalogda yer alan ürünlerin görselleri, baskıdan dolayı gerçek renk ve özelliklerini yansıtmıyor olabilirler.

Katalogda yer alan illüstrasyonlar gerçeklik yansıtmamakta olup, ürünlerin olabilecek kullanımlarına bağlı olarak tanıtma amacıyla görselleştirilmiştir.

Argesys Elektronik Sanayi ve Ticaret A.Ş. herhangi bir bildirim yayınlamaksızın ürünlerin isim ve özelliklerini değiştirme ve iptal etme hakkını elinde tutar. Güncel bilgiler için bizimle iletişime geçebilirsiniz.



LEGAL NOTICE

All printing and publishing rights of this catalog belong to Argesys Elektronik Sanayi ve Ticaret A.Ş.

The rights of the name, content, template, design and all documents in this catalog are reserved.

Product images in the catalog cannot be used or published without my knowledge and permission.

All electrical values given are measurement values. Lumen output and electrical load values may differ within +/- 10% tolerance. Light color temperature values are within +/- 150 K tolerance.

The visuals of the products in this catalog may not reflect their actual colors and features due to printing.

The illustrations in the catalog do not reflect reality and are visualized for promotional purposes depending on the possible uses of the products.

Argesys Elektronik Sanayi ve Ticaret A.Ş. reserves the right to change and cancel the names and features of the products without publishing any notification. You can contact us for up-to-date information.





HAKKIMIZDA

45 yıllık deneyimle günümüze kadar uzanan, **Elektronik ve Aydınlatma** sektöründe **Ür-Ge & Ar-Ge** odaklı faaliyetlerini sürdüren **Argesys Elektronik A.Ş** kaliteden ödün vermeden tasarım ve üretim yapmayı **“Doğru Işık Hayata Renk Verir”** ilkesiyle benimsemiştir. Firmamızın kurucusu **Alex Seyis** yenilikçi yaklaşımlara ve araştırmaya olan merakı ile 2003 yılında Türkiye’de bir ilki, LED’li aydınlatma ürünlerini geliştirerek, reklam ve aydınlatma sektörlerinde kullanılmak üzere tasarlayıp üreterek sektörde öncü olmuştur. Günümüze değin **Türkiye** başta olmak üzere, **Rusya, Almanya, İsviçre, Romanya, ABD, Cezayir, Güney Afrika** ve **Tunus** gibi birçok ülkeye tasarım ve üretim yaparak prestijli projelerde yer alıp dünyaya kalitesini ve ismini duyurmayı başarmıştır.

Argesys Elektronik A.Ş. çözüm ortaklarının ihtiyaçlarını doğru anlamak, bu doğrultuda çözümler üretmek ve memnuniyete dayalı mutlak başarıyı hedefleyerek Dünya standartlarına uygun ürünler tasarlamak için Ar-Ge yatırımlarını ve üretim kapasitesini artırmayı misyon edinmiştir. Ülkemizi geleceğe başarı ile taşıyacak Elektronik ve Aydınlatma sektörünün mimarı olmayı hedefleyen Argesys Elektronik A.Ş yarının teknolojisini yakalamak için Akıllı Elektronik ve Aydınlatma sistemlerini geliştirme vizyonu ile ilerleyen bir firmadır.



ABOUT US

With 45 years of experience, **Argesys Elektronik A.Ş.**, which continues its activities focused on **R&D and P&D** in the Electronics and Lighting sector, has adopted the principle of **“The Right Light Gives Color to Life”** to design and produce without compromising on quality. The founder of our company, **Alex Seyis**, has pioneered the sector by developing LED lighting products, a first in Turkey, in 2003 with his curiosity for innovative approaches and research, and by designing and producing them for use in the advertising and lighting sectors. Until today, it has managed to take part in prestigious projects by designing and producing for many countries, especially **Turkey**, as well as **Russia, Germany, Switzerland, Romania, the USA, Algeria, South Africa and Tunisia**, and has managed to announce its quality and name to the world.

Argesys Elektronik A.Ş. has adopted the mission of increasing its R&D investments and production capacity in order to correctly understand the needs of its solution partners, produce solutions in this direction and design products that comply with world standards by aiming for absolute success based on satisfaction. Aiming to be the architect of the Electronics and Lighting sector that will carry our country successfully into the future, Argesys Elektronik A.Ş. is a company that progresses with the vision of developing Smart Electronics and Lighting systems to catch up with tomorrow's technology.

SERTİFİKA / CERTIFICATE






REFERANSLAR REFERENCES

MATHILD PALACE / HUNGARY



LIBERTY FABAY / TURKIYE

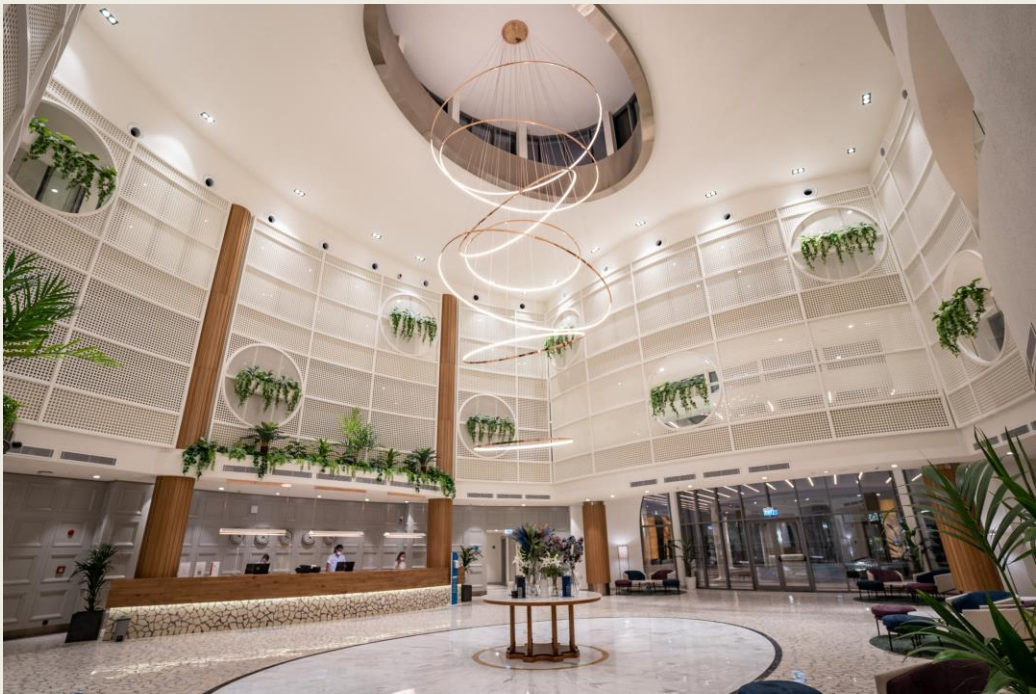

LIBERTY FABAY / TURKIYE



LIBERTY SIGNA / TURKIYE



LIBERTY LYKIA / TURKIYE




SO BEACH / TURKIYE



REGNUM GOL EVLERİ / ANTALYA



DİVRİĞİ CAMİ / TÜRKİYE

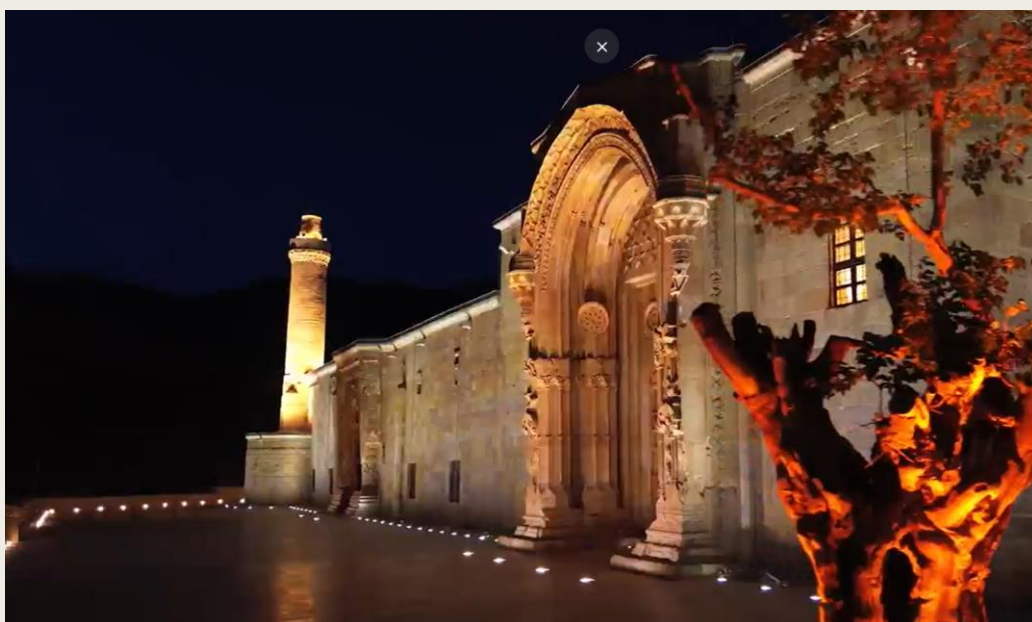

OMAR OTEL / KAYSERI



OTTOMARE SUIT / ISTANBUL



NUROL LIFE / ISTANBUL



NEF BUILTS / ISTANBUL



SIVA ALTI - RECESSED

DAMLA (Sayfa/Page:55)



CAPELLA (Sayfa/Page :47)



NAZ (Sayfa/Page:109)



ERA (Sayfa/Page:65)



GHINA (Sayfa/Page:71)



JASMIN (Sayfa/Page:73)



LUNA (Sayfa/Page:97)



RONA (Sayfa/Page:115)



ELA (Sayfa/Page:63)



LİVA SERIES (Sayfa/Page:85 -93)



TRIMLESS



LİVA



PRO



POWER



DEEP

SNAIL (Sayfa/Page:123)




SARKIT- *PENDANT*

LINEER (Sayfa/Page:81)



TINO (Sayfa/Page:131)



WILMA (Sayfa/Page:135)



SIVA ÜSTÜ – *SURFACE MOUNTED*

MONA (Sayfa/Page:105)



BORAK (Sayfa/Page :41)



BORAX (Sayfa/Page:43)



METHAN (Sayfa/Page:99)




TONOZ (Sayfa/Page :133)



AKARYAKIT AYDINLATMA – *GAS LIGHTING*

CANOPPY (Sayfa/Page:45)



STREET (Sayfa/Page:123-125)



STREET S

STREET L

ASLAN (Sayfa/Page :37)



OKUMA LAMBASI- *READING LAMP*

COMET (Sayfa/Page :53)



STOP- *SPOTLIGHT*

LIMA (Sayfa/Page:79)



SIERRA (Sayfa/Page:121)




LİNEER- *LINEAR*

MISRA (Sayfa/Page:103)




MISRA RGB (Sayfa/Page:101) LUKE (Sayfa/Page:103)




GİZLİ AYDINLATMA - *HIDDEN LIGHTING*

LENA (Sayfa/Page:77)



LINE STRIP (Sayfa/Page:83)



YERE GÖMME - *INGROUND*


ALPHA (Sayfa/Page:29)



AREN (Sayfa/Page:31)




ARES LOTUS(Sayfa/Page :35)



TALI (Sayfa/Page :127)



TALI TEK



TALI ÇİFT

ELA (Sayfa/Page:63)



ROSE (Sayfa/Page:117)



DUVARA MONTAJ - *WALL MOUNTED*

EVA (Sayfa/Page:67)



CLYDE (Sayfa/Page:49-51)




CLYDE



CLYDE X

BONNY (Sayfa/Page:39)



WALLWASHER

AREN (Sayfa/Page:33)



EYMEN (Sayfa/Page :69)



PEYZAJ AYDINLATMA – LANDSCAPE LIGHTING

YUSSI3 (Sayfa/Page:137)



EBRA (Sayfa/Page:61)



PEGGY (Sayfa/Page:111)



PEYZAJ SPOT – LANDSCAPE SPOTLIGHT

KEA (Sayfa/Page:75)



DANIŁA (Sayfa/Page:57)



NANO (Sayfa/Page:107)



TERRA (Sayfa/Page:129)



DINO (Sayfa/Page :59)





EFEKT AYDINLATMA – EFFECT LIGHTING

REA (Sayfa/Page :113)



DATASHEET - ALXSYS ALPHA

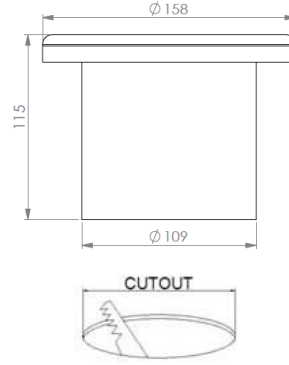

PRODUCT DESCRIPTION

- Corrosion resistant stainless-steel housing
- Ground recessed mountable.
- Safety class III
- Tempered safety glass
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67. IP68 air vent.
- Impact strength IK10
- All external screws used are in A2 stainless steel.

MOUNTING ACCESSORIES




*Plastic case for Alpha



TECHNICAL DATA

MODEL /SIZE	ALPHA
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	15W-25W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 – 265 VAC
OPTICS	10°, 25°, 40°
LUMEN OUTPUT	1400LM-2450LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI (EXTERNAL DRIVER)
DIMENSIONS (MM)	Ø:158MM, H: 115MM
CUT OUT (MM)	Ø:109MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	67

PHOTOMETRIC DATA

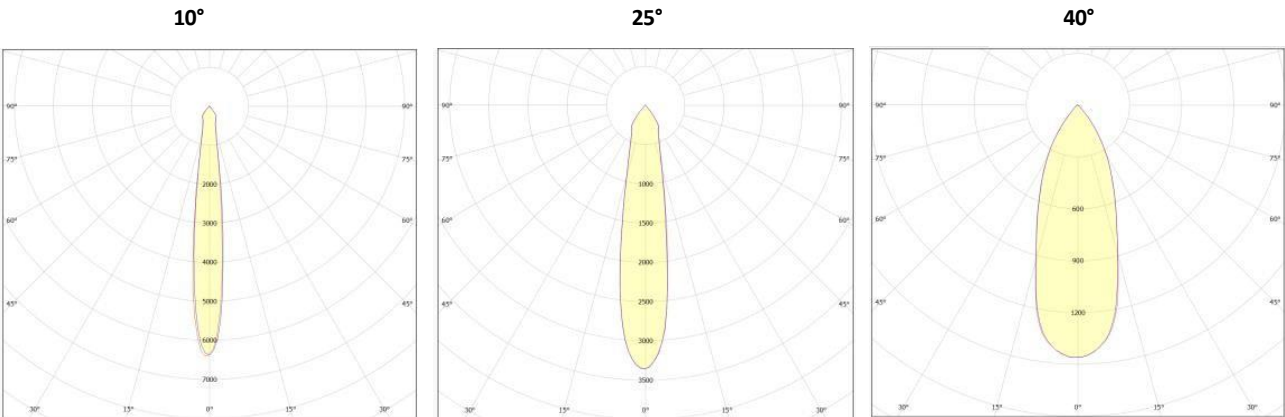

DATASHEET - ALXSYS AREN UNDERPLASTER



PRODUCT DESCRIPTION

- 100% Full cast aluminum body
- Aluminum heat sink body
- High efficiency group lens.
- Safety class II
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67. IP68 air vent.
- Impact strength IK08
- PVC side covers with UV protection.
- All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories

TECHNICAL DATA


MODEL /SIZE	AREN LS36	ARENLS66	ARENLS96	ARENLS126
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR			
LED	CREE / SAMSUNG / SEOUL			
POWER CONSUMPTION	14W	27W	40W	53W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K-RGB			
SDCM	STEP 2- 3			
CRI COLOUR RENDERING INDEX	80+			
VOLTAGE	180 - 265 VAC			
OPTICS	10° , 25° , 10X60° , 20X45°			
LUMEN OUTPUT	1200LM	1200LM	4000LM	5300LM
STORAGE TEMPERATURE	-40C / +80C			
OPERATING TEMPERATURE	-40C / 0C +6			
CONTROL SYSTEM	ON-OFF / DALI			
DIMENSIONS W/H/L(MM)	88/105/360	88/105/660	88/105/960	88/105/1260
HOUSING	EXT ALU, UV STABILIZED PMMA			
CABLES	RUBBER			
WARRANTY	5 YEARS			
IK CLASS	IK 08			
IP	67			

PHOTOMETRIC DATA


10°




25°




20x45°



10x60°




DATASHEET - ALXSYS AREN

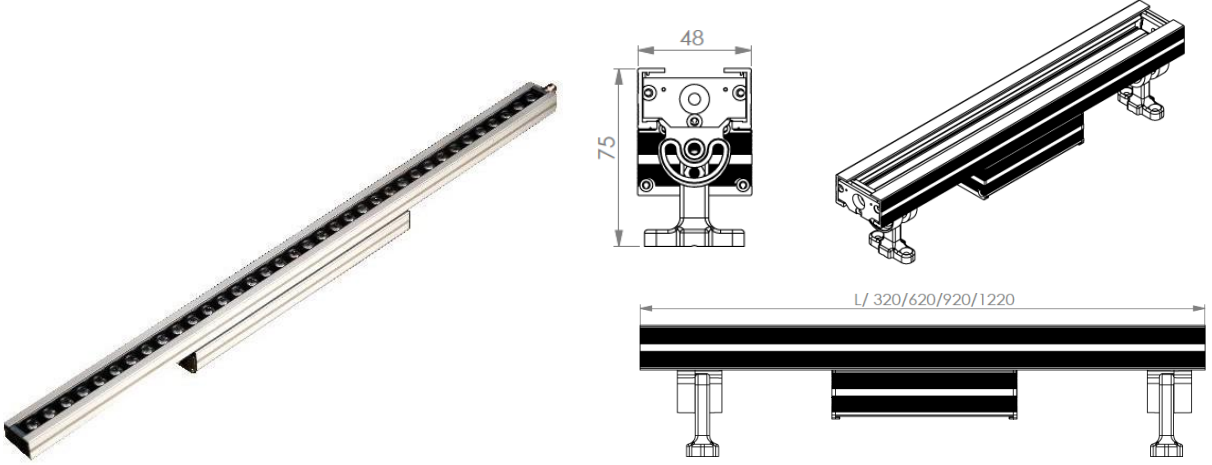

PRODUCT DESCRIPTION

- 100% Full cast aluminum body
- Adjustable type outdoor spotlight
- High efficiency group lens.
- Safety class II
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67. IP68 air vent.
- Impact strength IK07
- PVC side covers with UV protection.
- All external screws used are in A2 stainless steel.

ACCESSORIES

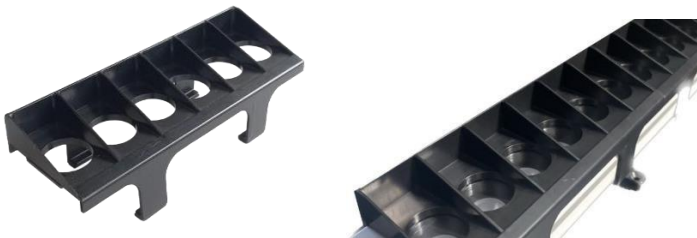

TECHNICAL DATA

MODEL /SIZE	AREN LS32	ARENLS62	ARENLS92	ARENLS122
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR			
LED	CREE / SAMSUNG / SEOUL			
POWER CONSUMPTION	14W	27W	40W	53W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K-RGB			
SDCM	STEP 2-3			
CRI COLOUR RENDERING INDEX	80+			
VOLTAGE	180 - 265 V AC			
OPTICS	10° , 25° , 10X60° , 20X45°			
LUMEN OUTPUT	1400LM	2700LM	4000LM	5300LM
STORAGE TEMPERATURE	-40C / +80C			
OPERATING TEMPERATURE	-40C / +60 C			
CONTROL SYSTEM	ON-OFF / DALI/DMX/1-10V			
DIMENSIONS W/H/L(MM)	48/75/320	48/75/620	48/75/920	48/75/1220
HOUSING	EXT ALU, UV STABILIZED PMMA			
CABLES	RUBBER			
WARRANTY	5 YEARS			
IK CLASS	IK 07			
IP	67			


PHOTOMETRIC DATA

10°



25°

20x45°

10x60°

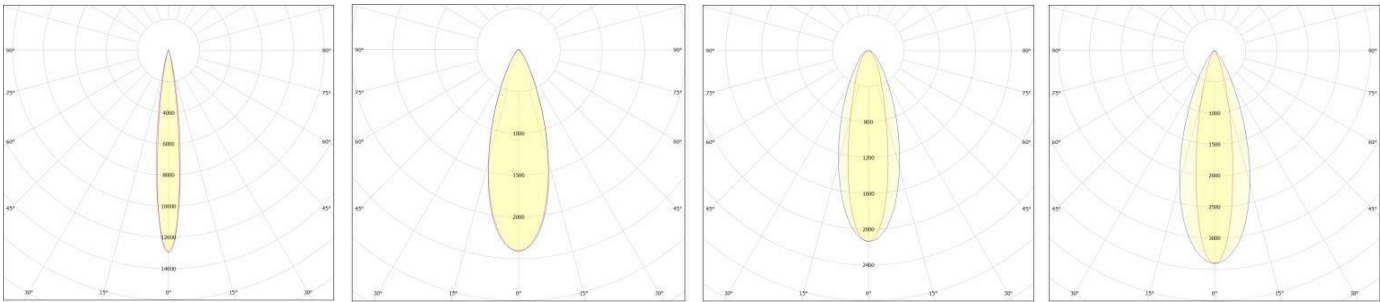

DATASHEET - ALXSYS ARES LOTUS

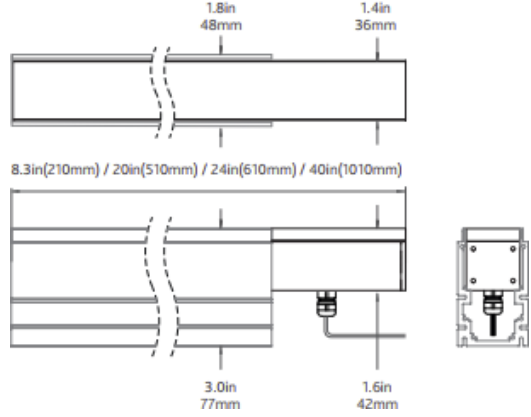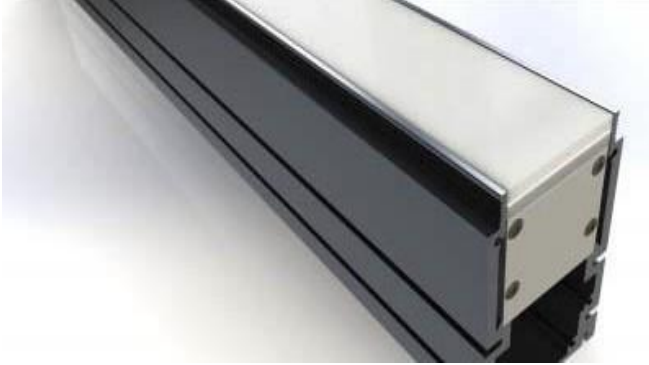

PRODUCT DESCRIPTION

- Linear in-ground luminaires in various lengths for installation in paved ground surfaces indoors and out.
- Ground recessed mountable.
- Installation housing made of aluminum
- Safety class III
- Tempered safety glass
- Watertight silicon rubber gasket
- Reflector made of pure anodised aluminum
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 65. IP68 air vent.
- Impact strength IK10
- All external screws used are in A2 stainless steel.
- The luminaires can be driven over by vehicles with pneumatic tyres.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	ARES LOTUS
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	36W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	24 VDC / 220 VAC EXTERNAL DRIVER
OPTICS	120°
LUMEN OUTPUT	570LM/MT, 2850LM/MT
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DMX
DIMENSIONS (MM)	W/H: 48/77MM
CUT OUT (MM)	48/77MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	65

PHOTOMETRIC DATA

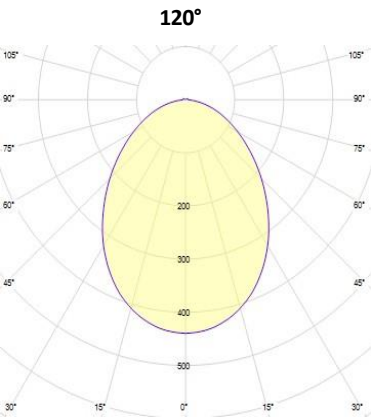

DATASHEET - ALXSYS ASLAN



IK10

850°



IP67



A+



PRODUCT DESCRIPTION

Lighting for circularity.

Safety class II

Clear toughened glass

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 67

Impact strength IK10

All external screws used are in A2 stainless steel.

For gas stations and high ceiling areas.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	ASLAN
INTERIOR/EXTERIOR	INTERIOR/EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	100W – 120W
LED COLOUR (FCCT)	4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC
OPTICS	100°
LUMEN OUTPUT	146LM/W
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	1140X110X110 MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	67

PHOTOMETRIC DATA

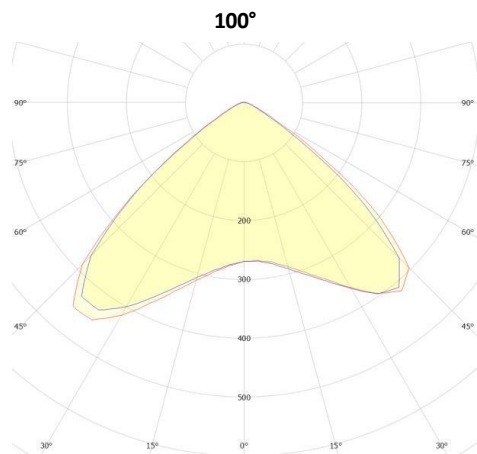

DATASHEET - ALXSYS BONNY



IK04





850°



IP 65



A+



PRODUCT DESCRIPTION

Single emission wall lights for outdoor application.

LED light source with an asymmetric wallwasher light

Safety glass with optical structure

Safety class II

Can be wall lights-mounted with an outer casing

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 65.

Dust-tight and protection against water jets Impact strength IK04

All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	BONNY
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	12-24VDC
OPTICS	60°
LUMEN OUTPUT	66LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	W/H/L:120X120X32.5MM
CUT OUT (MM)	W/H:101X101MM
HOUSING	DIE ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 04
IP	65

PHOTOMETRIC DATA

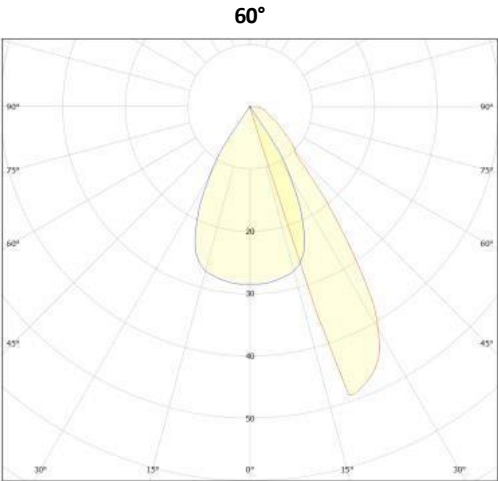

DATASHEET - ALXSYS BORAK



IK07


850°



IP40



A+

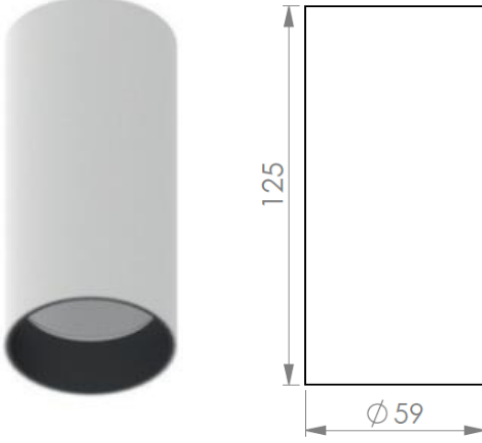

PRODUCT DESCRIPTION

Electrostatic powder coated aluminum body

Compact connection accessories

Safety class I

High efficiency reflector and PC glass

Watertight silicon rubber gasket

High current carrying cable

Protection class luminaire IP 40

Impact strength IK07

Narrow, medium and wide beam angle options

Effective thermal design

Simple design providing architectural integrity


ACCESSORIES



TECHNICAL DATA

MODEL /SIZE	BORAK
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	7W - 10W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	10°, 25°, 40°
LUMEN OUTPUT	500LM - 710 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI (EXTERNAL DRIVER)
DIMENSIONS (MM)	Ø:59MM, H: 125MM
CUT OUT (MM)	Ø:59MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	40

PHOTOMETRIC DATA

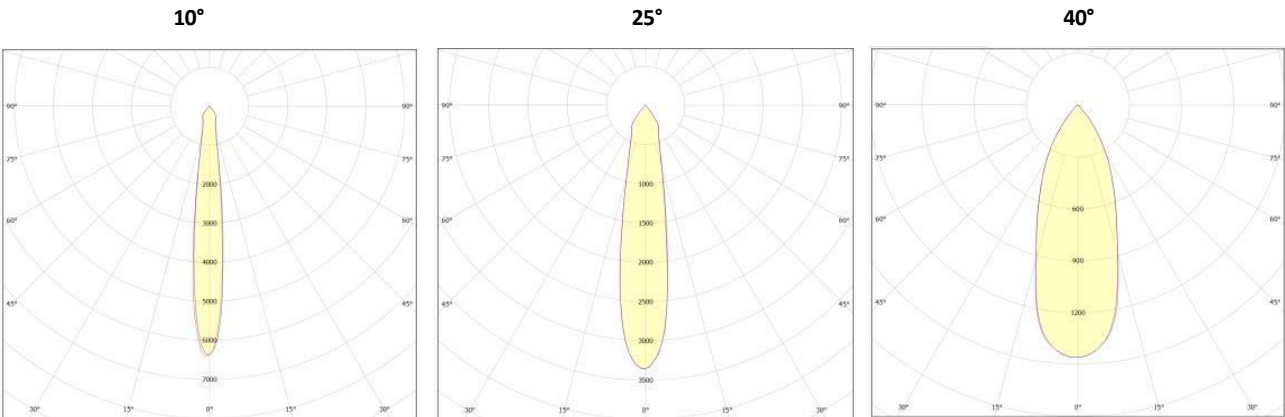

DATASHEET - ALXSYS BORAX



IK07


850°



IP40



A+

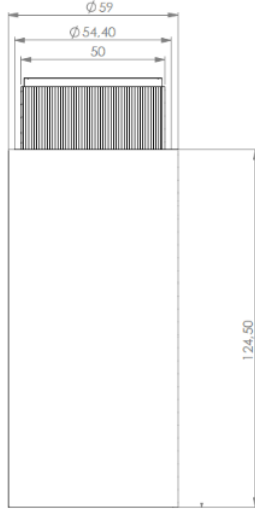

PRODUCT DESCRIPTION

A surface mounted, fixed spotlight with a powder coated metal body and solid metal detailing.

Electrostatic powder coated aluminum body

Compact connection accessories

Safety class I

High efficiency reflector and PC glass

Watertight silicon rubber gasket

High current carrying cable

Protection class luminaire IP 40

Impact strength IK07

Narrow, medium and wide beam angle options

The baffle captures light and creates a delicate metallic glow, whilst a honeycomb filter emits a precise, non-glare, directional spotlight. Simple design providing architectural integrity.


ACCESSORIES






TECHNICAL DATA

MODEL /SIZE	BORAX
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	7W - 10W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	10°, 25°, 40°
LUMEN OUTPUT	500LM - 710 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI (EXTERNAL DRIVER)
DIMENSIONS (MM)	Ø:59MM, H: 124,5MM
CUT OUT (MM)	Ø:59MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	40

PHOTOMETRIC DATA

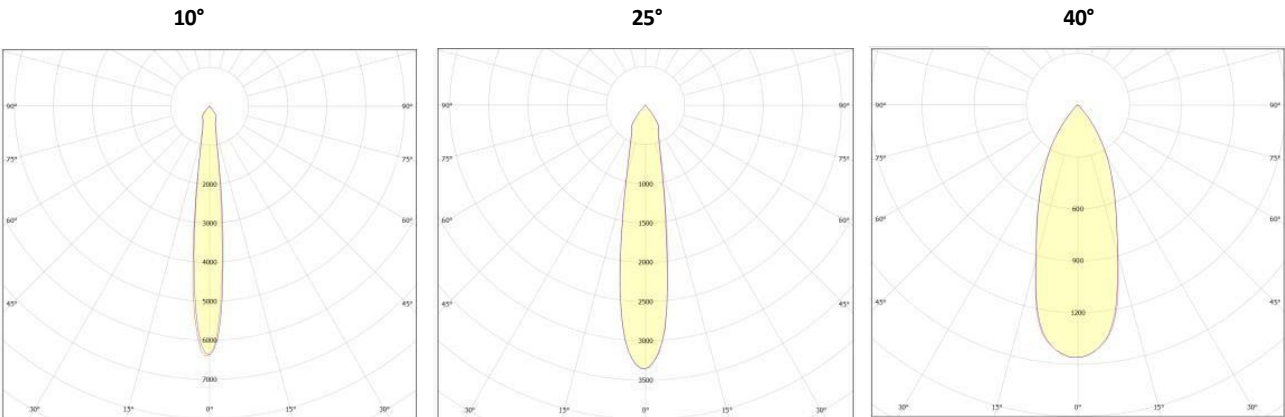

DATASHEET - ALXSYS CANOPPY

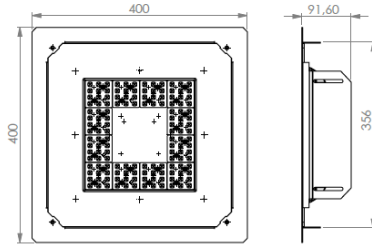

PRODUCT DESCRIPTION

Good lighting of fuel stations provides a safe and attractive environment for drivers during the journey. Different installation brackets-Surface mounting /Recessed mounting /Bracket mounting.

Safety class II

Full white color body

High current carrying cable

Modern and elegant design with Die-casting housing and Tempered glass

Protected against splash water

Protection class luminaire IP 67. IP68 air vent.

Impact strength IK10

Reliable LED driver and high efficacy LED chips

All external screws used are in A2 stainless steel.


ACCESSORIES



TECHNICAL DATA

MODEL /SIZE	CANOPPY 50	CANOPPY 65	CANOPPP 75	CANOPPY 100
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR			
LED	SAMSUNG			
POWER CONSUMPTION	50W	65W	75W	100W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K-RGB			
SDCM	STEP 2-3			
CRI COLOUR RENDERING INDEX	80+			
VOLTAGE	90 – 265 VAC			
OPTICS	60° ,90°			
LUMEN OUTPUT	7000LM	8000LM	9000LM	11500LM
STORAGE TEMPERATURE	-40C / +80C			
OPERATING TEMPERATURE	-40C / +60C			
CONTROL SYSTEM	ON-OFF			
DIMENSIONS W/H/L(MM)	340/340/57MM			
PANEL CUT OUT (MM)	360/360MM			
HOUSING	DIE ALU, EXT ALU, TEMPERED GLASS			
CABLES	RUBBER			
WARRANTY	5 YEARS			
IK CLASS	IK 10			
IP	67			

PHOTOMETRIC DATA

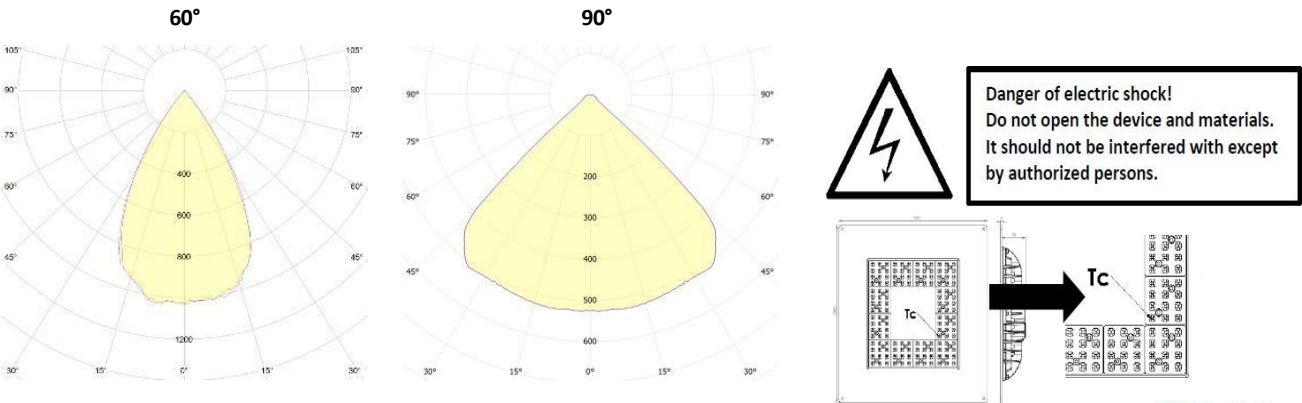

DATASHEET - ALXSYS CAPELLA



850°



PRODUCT DESCRIPTION

- Aluminum body
- Flush low glare diffuser
- High lumen output
- Low power consumption
- Safety class II
- Watertight silicon rubber gasket
- High current carrying cable
- Protection class luminaire IP 20 or IP 40.
- Impact strength IK07
- All external screws used are in A2 stainless steel.
- Flex and plug
- 3-hour emergency battery kit for built-in products (optional).

ACCESSORIES




*No accessories


TECHNICAL DATA

MODEL /SIZE	CAPELLA 4"	CAPELLA 6"	CAPELLA 8"
INTERIOR/EXTERIOR	INTERIOR		
LED	CREE / SAMSUNG / SEOUL		
POWER CONSUMPTION	12W	18W	24W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K		
SDCM	STEP 2-3		
CRI COLOUR RENDERING INDEX	80+		
VOLTAGE	180 – 265 VAC		
OPTICS	120°		
LUMEN OUTPUT	12W	18W	24W
STORAGE TEMPERATURE	-40C / +80C		
OPERATING TEMPERATURE	-40C / +60C		
CONTROL SYSTEM	ON-OFF / DALI		
DIMENSIONS Ø/H(MM)	120/49MM	177/49MM	225/49MM
CUT OUT (MM)	105MM	152MM	205MM
HOUSING	DIE ALU, PMMA		
CABLES	RUBBER		
WARRANTY	5 YEARS		
IK CLASS	IK 07		
IP	20 - 40		

PHOTOMETRIC DATA

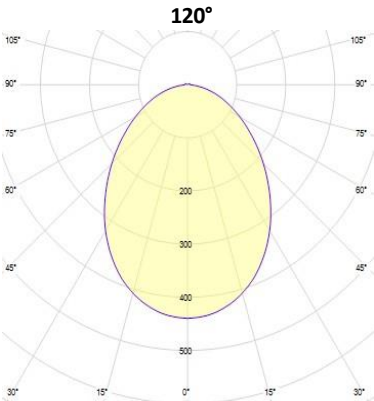

DATASHEET - ALXSYS CLYDE X

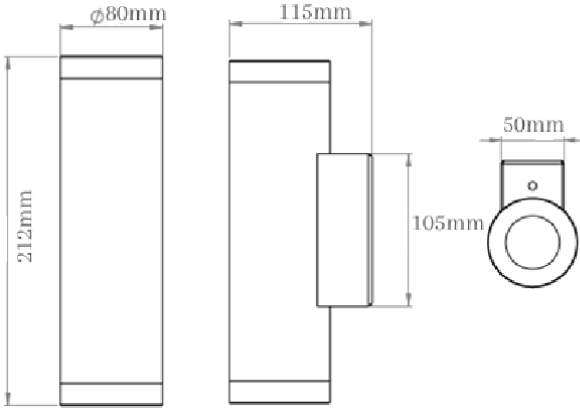

PRODUCT DESCRIPTION

- Electrostatic powder coated aluminum body.
- Tempered glass cover
- Convenient to be used with COB led.
- Safety class II
- Weatherproof and durable silicone rubber gasket.
- Stainless steel fittings.
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 65.
- Impact strength IK10
- All external screws used are in A2 stainless steel.
- Narrow, medium and wide beam angles available.
- Single-sided or two-sided light output with different light angle possibilities.

ACCESSORIES




*No accessories


TECHNICAL DATA

MODEL /SIZE	CLYDE X
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	2X10W
LED COLOUR (FCCT)	2700K-3000K-4000K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 - 265 VAC
OPTICS	15° , 25° , 35°
LUMEN OUTPUT	2X1000LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI
DIMENSIONS (MM)	Ø/H: 80/212MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	65

PHOTOMETRIC DATA

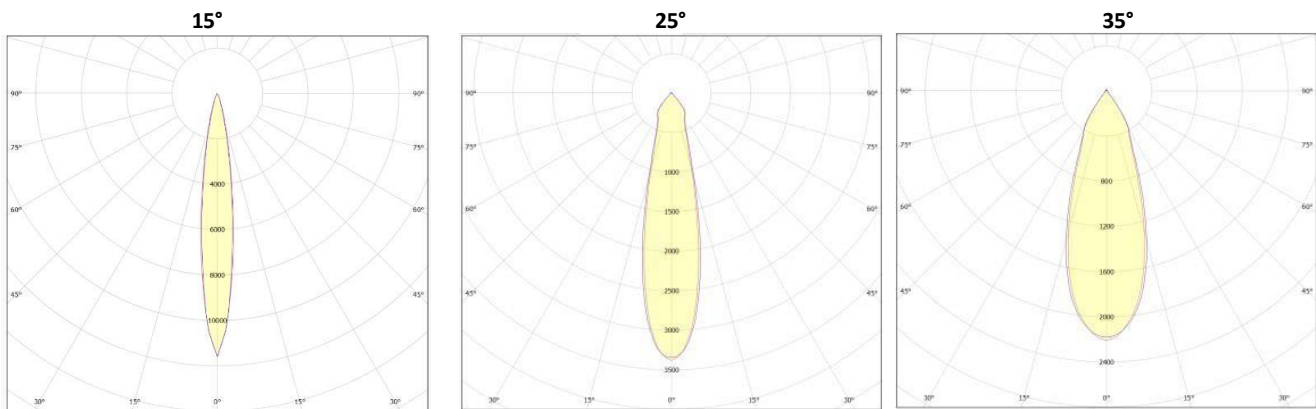

DATASHEET - ALXSYS CLYDE

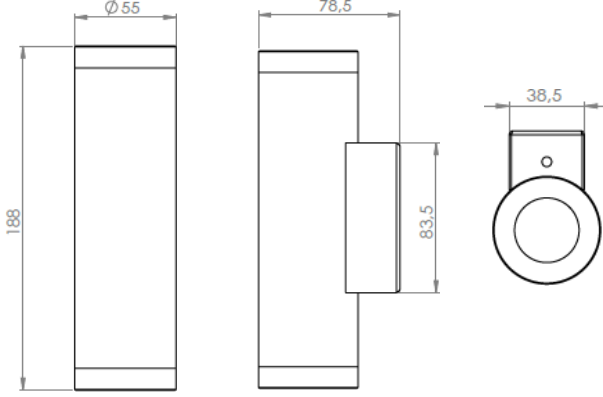

PRODUCT DESCRIPTION

- Electrostatic powder coated aluminum body.
- Tempered glass cover
- Convenient to be used with COB led.
- Safety class II
- Weatherproof and durable silicone rubber gasket.
- Stainless steel fittings.
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 65.
- Impact strength IK10
- All external screws used are in A2 stainless steel.
- Narrow, medium and wide beam angles available.
- Single-sided or two-sided light output with different light angle possibilities.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	CLYDE
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	2X7W
LED COLOUR (FCCT)	2700K-3000K-4000K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 - 265 VAC
OPTICS	15° , 25° , 35°
LUMEN OUTPUT	2X600LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI
DIMENSIONS (MM)	Ø/H: 55/188MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	65

PHOTOMETRIC DATA

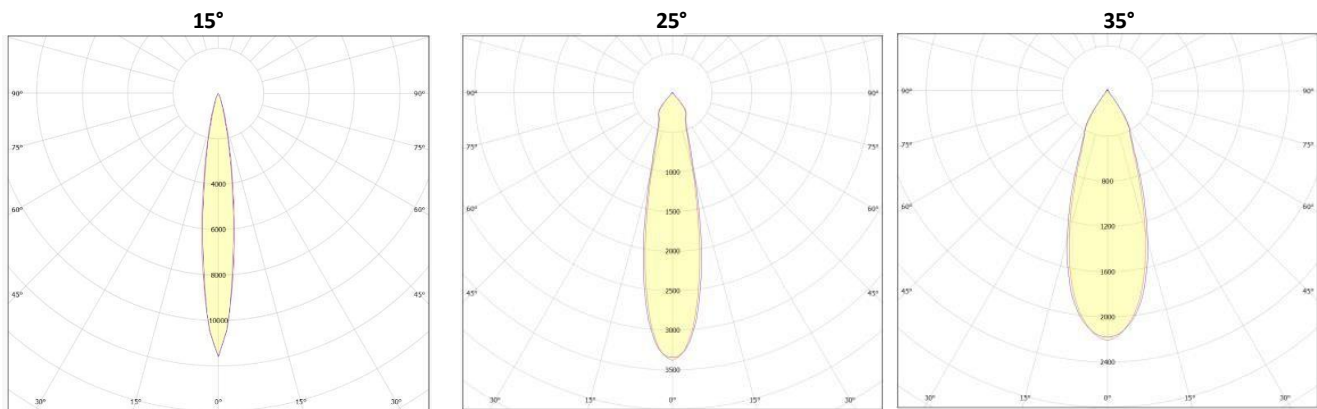

DATASHEET – ALXSYS COMET



IK07


850°



IP40



A+

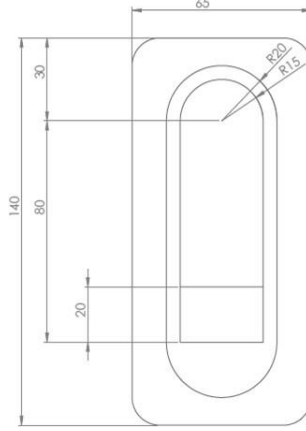

PRODUCT DESCRIPTION

Injected aluminium structure and a frontal piece of transparent polycarbonate.

Bedside LED wall lamp product is a book reading light with its mobile structure and aesthetic design.

Adjustable

Safety class I

High current carrying cable

Protection class luminaire IP 40

Impact strength IK07

Effective thermal design

It is suitable for recessed mounting.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL / SIZE	COMET
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	15°
LUMEN OUTPUT	240LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	W/H/L:65/140/25MM
CUT OUT (MM)	W/H:50/120MM
HOUSING	DIE ALU, EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	20


PHOTOMETRIC DATA

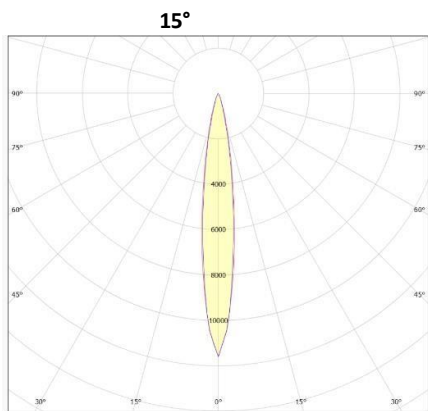

DATASHEET - ALXSYS DAMLA



850°

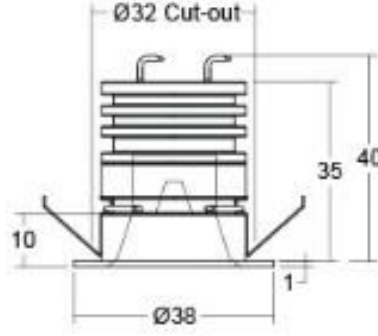

PRODUCT DESCRIPTION

High quality aluminum

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Recessed ceiling luminaires achieve their full potential when used in conjunction with light and building control systems.

Safety class I

High current carrying cable

Protection class luminaire IP 54

Impact strength IK07

Effective thermal design

It is suitable for recessed mounting.

ACCESSORIES




*No accessories

TECHNICAL


DATA

MODEL /SIZE	DAMLA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	2W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	30°
LUMEN OUTPUT	195LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF/DALI
DIMENSIONS (MM)	Ø/H:38/40MM
CUT OUT (MM)	Ø/H:32MM
HOUSING	EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	54

PHOTOMETRIC DATA

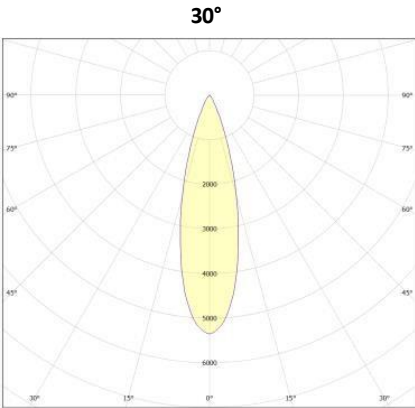

DATASHEET - ALXSYS DANILA



PRODUCT DESCRIPTION

- 100% Full cast aluminum body
- Adjustable type outdoor spotlight
- Spotlight luminaire intended for use with LED light sources.
- Safety class II
- Clear toughened glass
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67
- Impact strength IK10
- All external screws used are in A2 stainless steel.
- This stake is used to mount the product into soil ground


ACCESSORIES



TECHNICAL DATA

MODEL /SIZE	DANIŁA
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3-7W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 - 265 VAC
OPTICS	20° , 35° , 45°
LUMEN OUTPUT	100LM/W
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI
DIMENSIONS (MM)	Q:45MM, H: 80MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	67

PHOTOMETRIC DATA

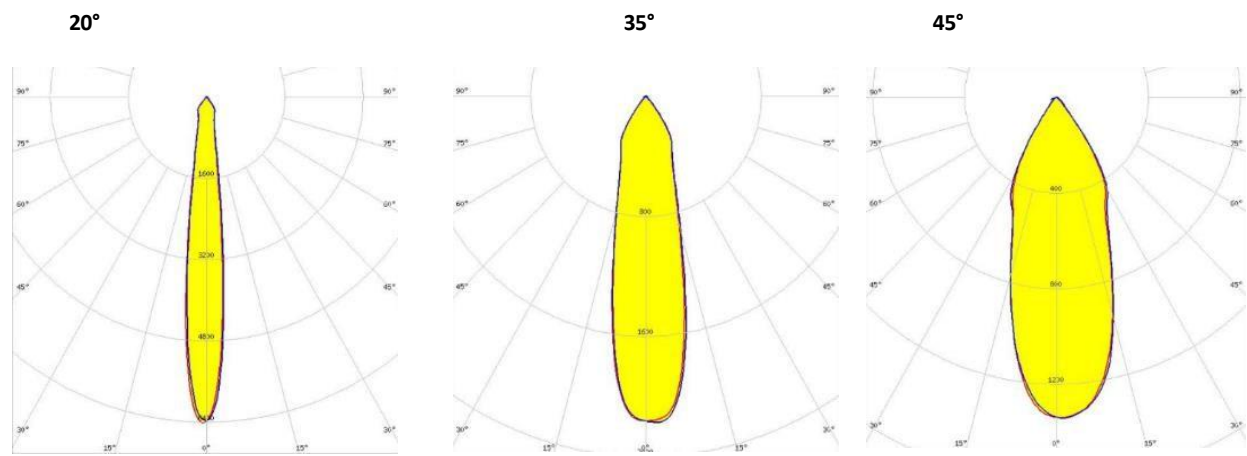

DATASHEET - ALXSYS DINO



IK04



850°



IP 65



A+

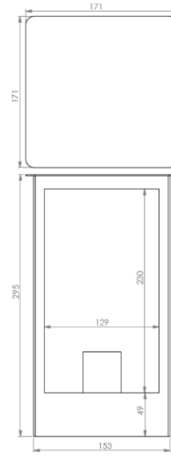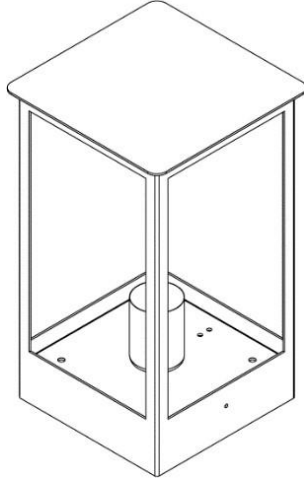

PRODUCT DESCRIPTION

The Dino outdoor light in textured is a contemporary take on a traditional design.

This compact pedestal light looks striking on top of gate posts or lining a path on top of bollards.

Made from stainless steel which is highly rust resistant and provides a durable, high quality look and feel.

Safety class I

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 65.

Dust-tight and protection against water jets Impact strength IK04

All external screws used are in A2 stainless steel.

Designed for pedestal or post-top installation only.

ACCESSORIES




*No accessories


TECHNICAL
DATA

MODEL /SIZE	DINO
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	LED BULB
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC
OPTICS	360°
LUMEN OUTPUT	300LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	W/H/L: 171/171/295MM
HOUSING	EXT. ALU, TEMPERED GLASS
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 04
IP	65

PHOTOMETRIC DATA

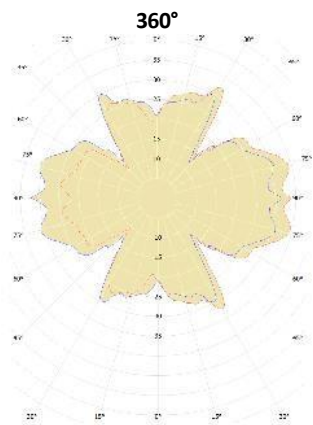

DATASHEET - ALXSYS EBRA



PRODUCT DESCRIPTION

The Ebra LED Reed Lights in are the perfect way to add a touch of elegance and sophistication to outdoor space. The flexible light can be installed anywhere you want, making it easy to create the perfect lighting effect. They are IP67 rated, making them weatherproof and suitable for outdoor use.

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 67. IP68 air vent.

Impact strength IK07

All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories



TECHNICAL DATA

MODEL /SIZE	EBRA 50	EBRA 75	EBRA 100
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR		
LED	CREE / SAMSUNG / SEOUL		
POWER CONSUMPTION	3W		
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K		
SDCM	STEP 2-3		
CRI COLOUR RENDERING INDEX	80+		
VOLTAGE	12-24VDC		
OPTICS	360°		
LUMEN OUTPUT	170LM		
STORAGE TEMPERATURE	-40C / +80C		
OPERATING TEMPERATURE	-40C / +60C		
CONTROL SYSTEM	ON-OFF		
DIMENSIONS (MM)	Ø/H:15/500MM	Ø/H:15/750MM	Ø/H:15/1000MM
HOUSING	EXT ALU, UV STABILIZED PMMA		
CABLES	RUBBER		
WARRANTY	5 YEARS		
IK CLASS	IK 07		
IP	67		

PHOTOMETRIC DATA

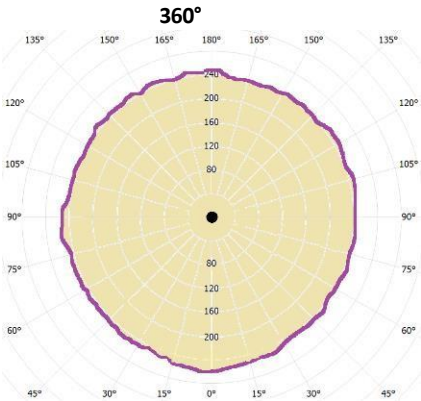

DATASHEET – ALXSYS ELA

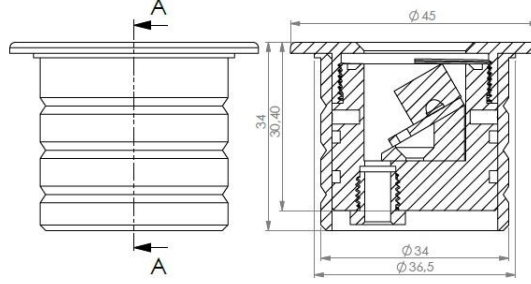

PRODUCT DESCRIPTION

High quality aluminum

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Recessed ceiling luminaires achieve their full potential when used in conjunction with light and building control systems.

Safety class I

High current carrying cable

Protection class luminaire IP 54

Impact strength IK07

Effective thermal design

It is suitable for recessed mounting.

ACCESSORIES




*No accessories


TECHNICAL DATA

MODEL / SIZE	ELA
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	1W – 2W
LED COLOUR (FCCT)	2700K–3000K–4000K–6500K
SDCM	STEP 2–3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180–265 VAC / EXTERNAL DRIVER
OPTICS	45°
LUMEN OUTPUT	88LM– 160LM
STORAGE TEMPERATURE	–40C / +80C
OPERATING TEMPERATURE	–40C / +60C
CONTROL SYSTEM	ON–OFF
DIMENSIONS (MM)	Ø/H:45/34MM
CUT OUT (MM)	Ø/H:38MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	54

PHOTOMETRIC DATA

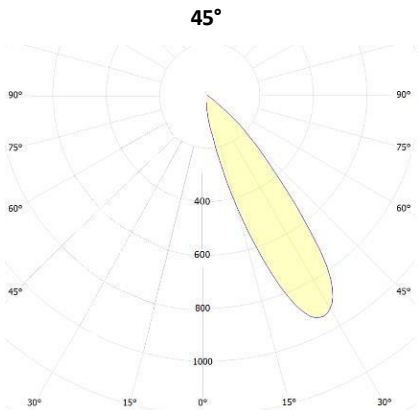

DATASHEET - ALXSYS ERA

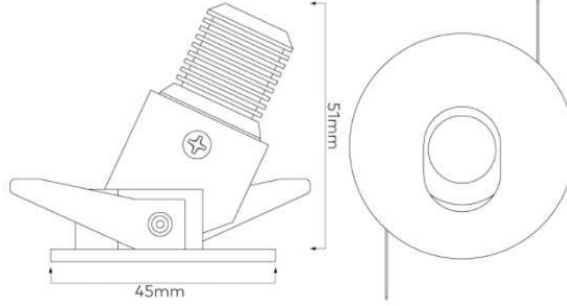

PRODUCT DESCRIPTION

The simple form of the Era range of downlights blends seamlessly with ceiling details to create low glare accent or general light.

With options for a wide range of colour temperatures in addition to a warm dimming variable white colour feature the Era series is able to be utilised in a wide range of architectural lighting applications.

Recessed ceiling luminaires achieve their full potential when used in conjunction with light and building control systems.

Safety class I

High current carrying cable

Protection class luminaire IP 20

Impact strength IK04

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	ERA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	2W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	20°
LUMEN OUTPUT	95LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF/DALI
DIMENSIONS (MM)	Ø/H:45/51MM
CUT OUT (MM)	Ø/H:35MM
HOUSING	EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 04
IP	20

PHOTOMETRIC DATA

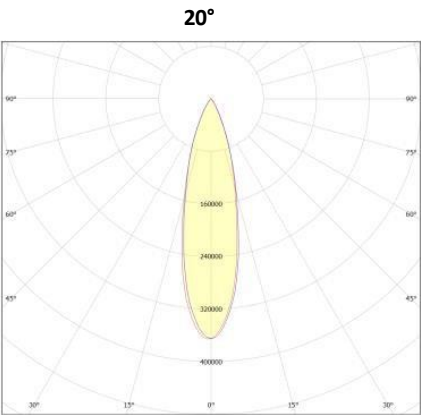

DATASHEET – ALXSYS EVA



IK04




850°



IP 65



A+



PRODUCT DESCRIPTION

Single emission wall and step lighting luminaires for outdoor applications.

LED light source with an asymmetric wallwasher light.

Safety glass with optical structure

Safety class II

Can be wall lights-mounted with an outer casing

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 65.

Dust-tight and protection against water jets Impact strength IK04

All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories



TECHNICAL DATA

MODEL / SIZE	EVA
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	12-24VDC
OPTICS	60°
LUMEN OUTPUT	90LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	W/H/L:50X50X25,2MM
CUT OUT (MM)	Ø:37MM
HOUSING	DIE ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 04
IP	65

PHOTOMETRIC DATA

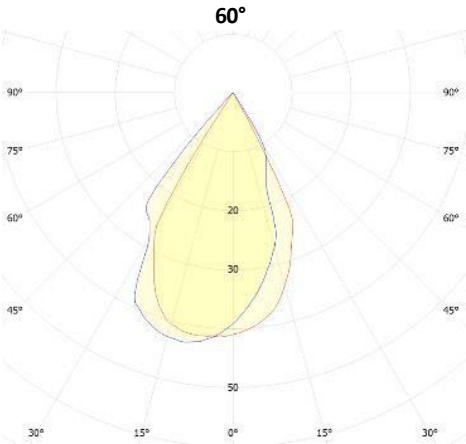

DATASHEET - ALXSYS EYMEN

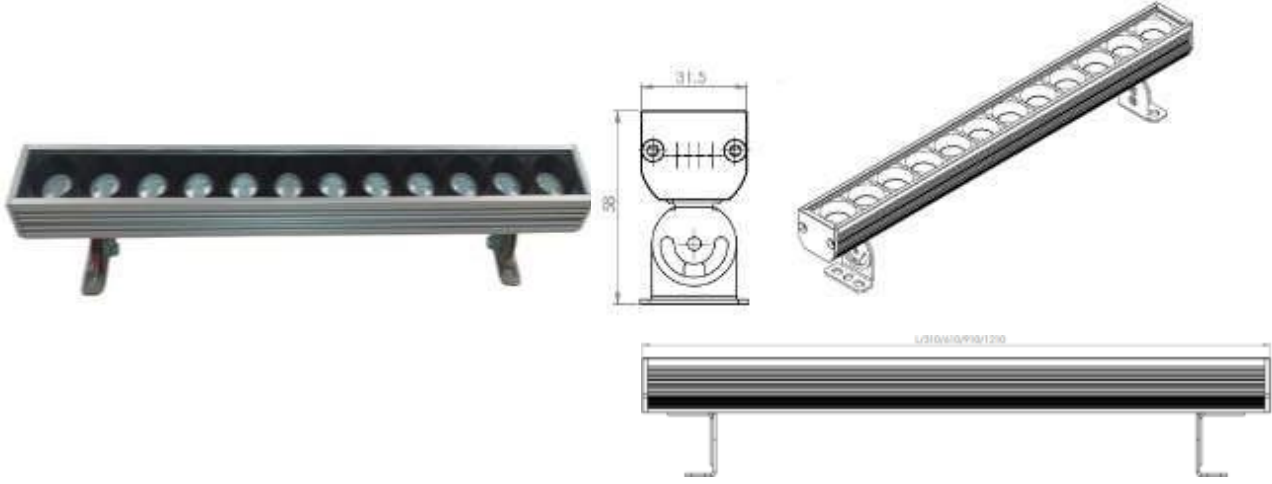

PRODUCT DESCRIPTION

- 100% Full cast aluminum body
- Adjustable type indoor spotlight
- High efficiency group lens.
- Safety class II
- Watertight silicon rubber gasket
- High current carrying cable
- Protection class luminaire IP 40.
- Impact strength IK07
- All external screws used are in A2 stainless steel.

ACCESSORIES



TECHNICAL DATA

MODEL /SIZE	EYMEN LS31	EYMEN LS61	EYMEN LS91	EYMEN LS121
INTERIOR/EXTERIOR	INTERIOR			
LED	CREE / SAMSUNG / SEOUL			
POWER CONSUMPTION	14W	27W	40W	53W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K			
SDCM	STEP 2-3			
CRI COLOUR RENDERING INDEX	80+			
VOLTAGE	180-265 VAC / EXTERNAL DRIVER			
OPTICS	10° , 25° , 10X60° , 20X45°			
LUMEN OUTPUT	1400LM	2700LM	4000LM	5300LM
STORAGE TEMPERATURE	-40C / +80C			
OPERATING TEMPERATURE	-40C / +60C			
CONTROL SYSTEM	ON-OFF / DALI			
DIMENSIONS W/H/L(MM)	31,5/58/310	31,5/58/610	31,5/58/910	31,5/58/1210
HOUSING	EXT ALU, UV STABILIZED PMMA			
CABLES	RUBBER			
WARRANTY	5 YEARS			
IK CLASS	IK 07			
IP	40			


PHOTOMETRIC DATA

10°

25°

20x45°

10x60°

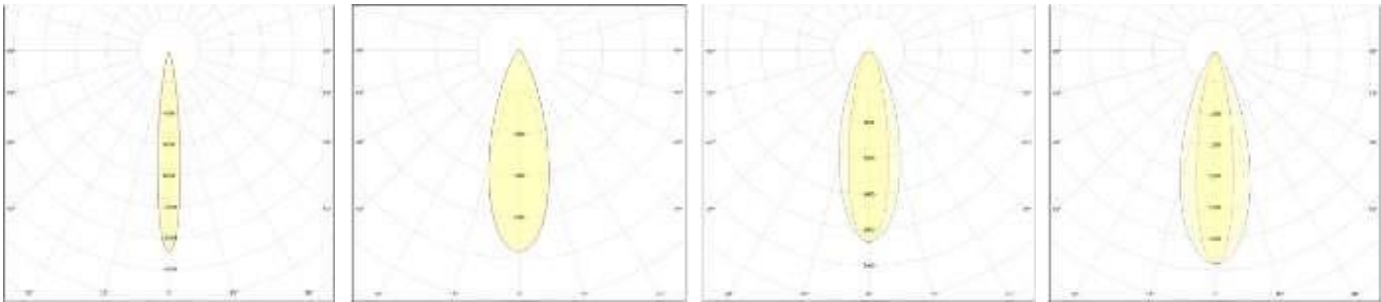

DATASHEET - ALXSYS GHINA



IK07

850°




IP44




A+



Adjustable

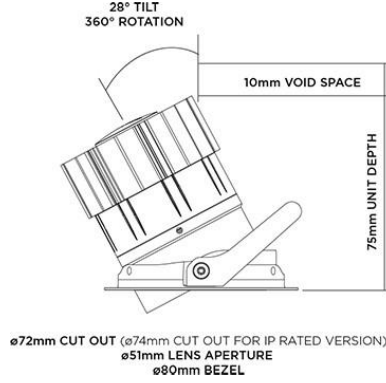

Fixed

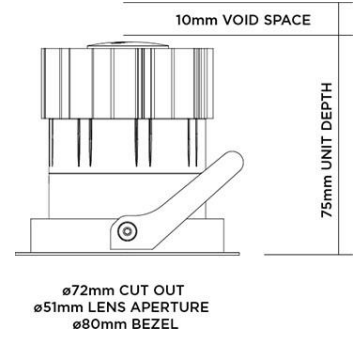

PRODUCT DESCRIPTION

High quality aluminum

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Recessed ceiling luminaires achieve their full potential when used in conjunction with light and building control systems.

Safety class I

High current carrying cable

Protection class luminaire IP 20 or IP44

Impact strength IK07

Effective thermal design

It is suitable for recessed mounting.

ACCESSORIES




TECHNICAL





DATA

MODEL /SIZE	GHINA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	7W - 11W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	10° - 25° - 40°
LUMEN OUTPUT	500LM - 880 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF/DALI
DIMENSIONS (MM)	Ø/H:80/75MM
CUT OUT (MM)	Ø/H:72MM
HOUSING	EXT ALU, DIE ALU, PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	20 / 44

PHOTOMETRIC DATA

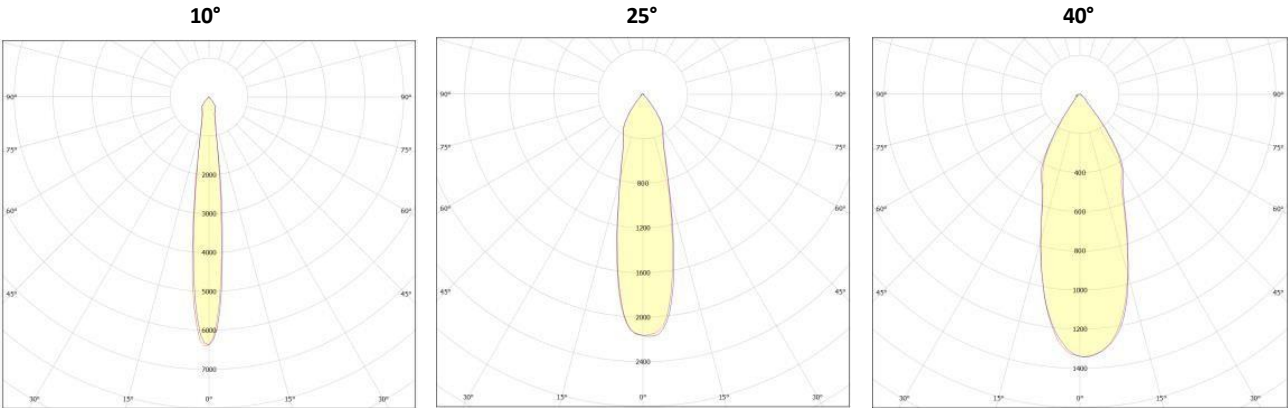

DATASHEET – ALXSYS JASMIN



PRODUCT DESCRIPTION

With uniform light, perfect light spot and soft lighting

Adjustable recessed spotlight

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Recessed ceiling luminaires achieve their full potential when used in conjunction with light and building control systems.

Safety class I

High current carrying cable

Protection class luminaire IP 40.

Impact strength IK07

Effective thermal design

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL / SIZE	JASMIN
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	2W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	12°,45°,60°,90°,19-34°ASYM
LUMEN OUTPUT	160LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF/DALI
DIMENSIONS (MM)	Ø/H:54/35MM
CUT OUT (MM)	Ø/H:42MM
HOUSING	EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	40

PHOTOMETRIC DATA

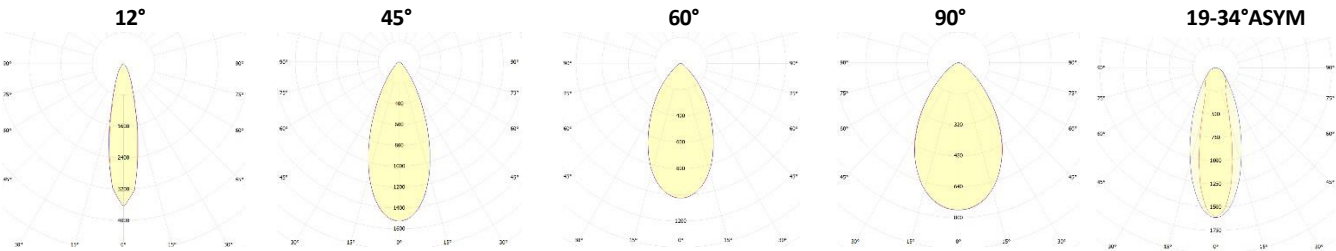

DATASHEET - ALXSYS KEA



IK10


850°



IP67



A+

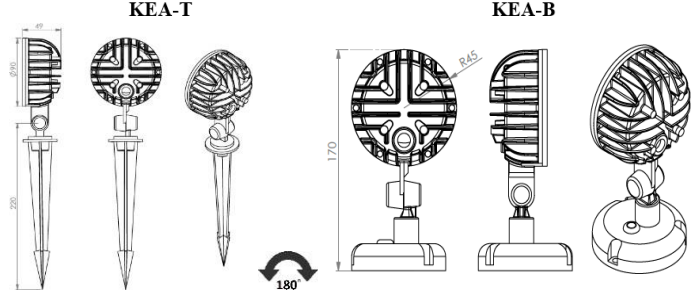

PRODUCT DESCRIPTION

- 100% Full cast aluminum body
- Adjustable type outdoor spotlight
- Spotlight luminaire intended for use with LED light sources.
- Safety class II
- Clear toughened glass
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67
- Impact strength IK10
- All external screws used are in A2 stainless steel.
- This stake is used to mount the product into soil ground


ACCESSORIES






TECHNICAL DATA

MODEL /SIZE	KEA T	KEA B
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	
LED	CREE / SAMSUNG / SEOUL	
POWER CONSUMPTION	10-15W	
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K	
CRI COLOUR RENDERING INDEX	80+	
VOLTAGE	48VDC / 220VAC	
OPTICS	10° - 25° - 40°	
LUMEN OUTPUT	900LM-1450LM	
STORAGE TEMPERATURE	-40C / +80C	
OPERATING TEMPERATURE	-40C / +60C	
CONTROL SYSTEM	ON-OFF	
DIMENSIONS (MM)	Ø:90/H: 330MM	Ø:90/H: 170MM
HOUSING	DIE ALU, TEMPERED GLASS	
CABLES	RUBBER	
WARRANTY	5 YEARS	
IK CLASS	IK 10	
IP	67	

PHOTOMETRIC DATA

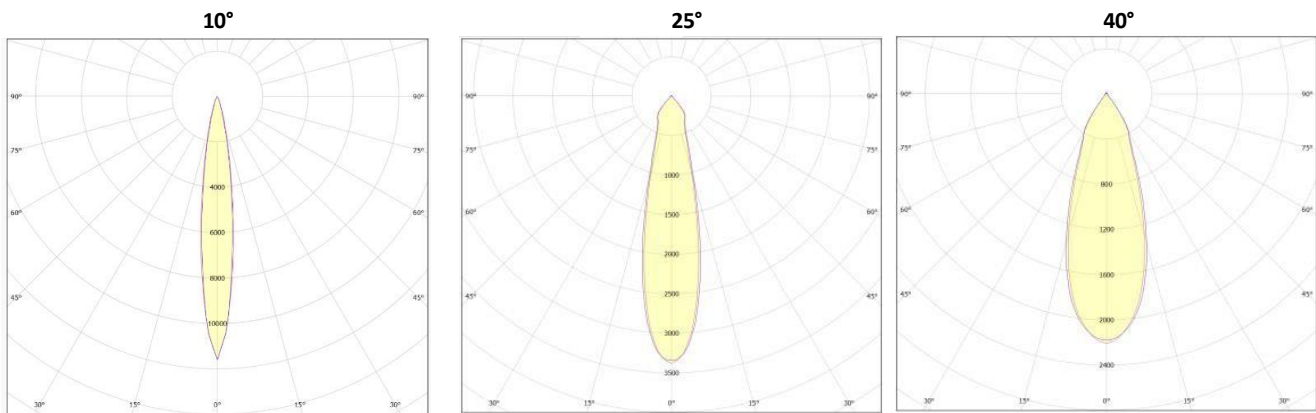

DATASHEET - ALXSYS LENA



PRODUCT DESCRIPTION

LENA is suitable for seamless installation as wall or ceiling lighting in drywall installations.

The extreme thinness of the profile, which is unique in the market, allows the connection in parallel of several bars together and creates a slightest line of light, infinite and homogeneous.

Surface aluminum indoor profiles are essential to improve LED strip performance and lifetime as they allow to correct heat dissipation.

The oval plastic cover is optionally available in transparent, frosted and opal.

Safety class II

High current carrying cable

Protection class luminaire IP 40.

Impact strength IK07

3-hour emergency battery kit for built-in products (optional).

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	LENA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	5W/MT - 12W/MT
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	24VDC / EXTERNAL DRIVER
OPTICS	120°
LUMEN OUTPUT	650LM/MT - 1440LM/MT
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI
DIMENSIONS Ø/H(MM)	W/H: 11/11MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 08
IP	40

PHOTOMETRIC DATA

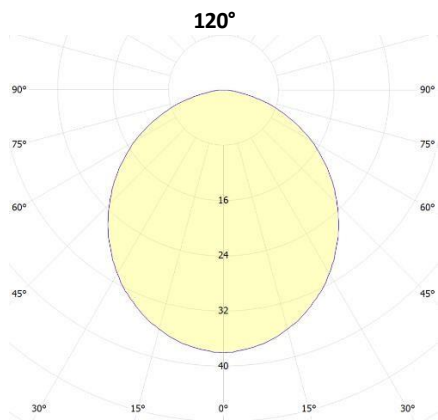

DATASHEET - ALXSYS LIMA



IK07


850°



IP20



A+



PRODUCT DESCRIPTION

Aluminium die cast body with electrostatic powder coated.

LIMA LED track spotlights bring flexible light into architecture: movability is their most important feature. Track spotlights contribute to application-related, effective and sustainable lighting: light only reaches where it is needed and seen.

Clear glass with high light transmittance.

Safety class I

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

Low energy consumption, high efficiency. Long life.

It is suitable surface track mounting.

Shock and vibration resistant construction.

MOUNTING ACCESSORIES




*Spotlight for phase track. (1 Meter or 2 Meter)

TECHNICAL DATA

MODEL /SIZE	LIMA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	10W - 14W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC
OPTICS	15° , 30 °
LUMEN OUTPUT	900LM - 1200 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/H:70/105MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	20


PHOTOMETRIC DATA

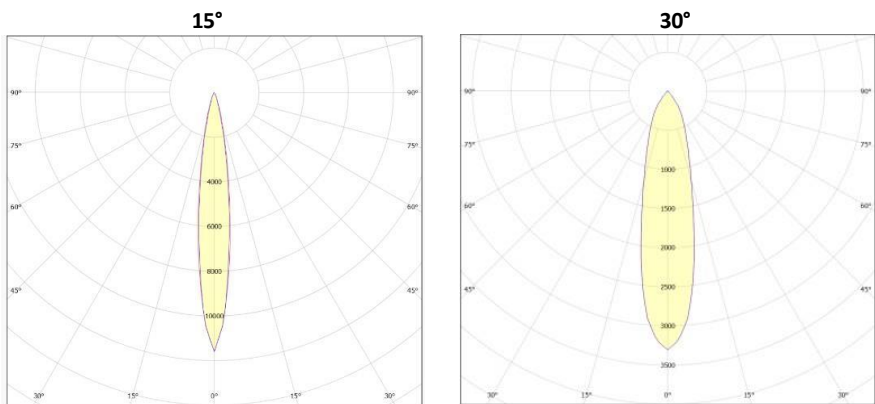

DATASHEET - ALXSYS LINEER



850°

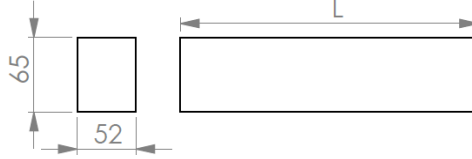

PRODUCT DESCRIPTION

Ideally suited for lighting above a table or in the office.

Available in black and white.

The LINEER pendant lamp has 2 suspension points and are adjustable in height.

Pendant options for LINEER, pendant, surface type.

Efficient / homogeneous / lower glare lighting thanks to exclusively designed diffuser Safety class I

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

Often applied to: office, dining table, kitchen or conference table.

DALI dim option, suitable for automation (optional)

Emergency kit is available with 3-hours battery pack (optional)

MOUNTING ACCESSORIES




*No accessories

TECHNICAL



DATA

MODEL /SIZE	LINEER
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	40W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
UGR VALUE	<21
VOLTAGE	180-265 VAC
OPTICS	120°
LUMEN OUTPUT	4000LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF/DALI
DIMENSIONS (MM)	W/H:52/65/1160MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	20

PHOTOMETRIC DATA

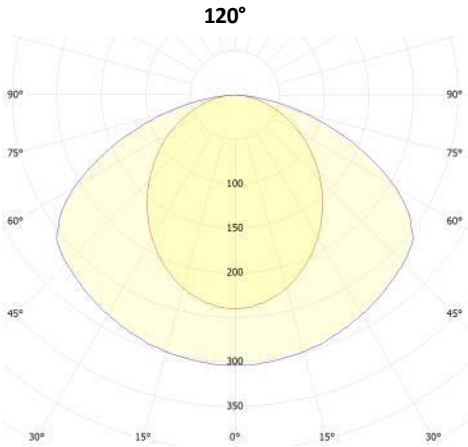

DATASHEET - ALXSYS STRIP

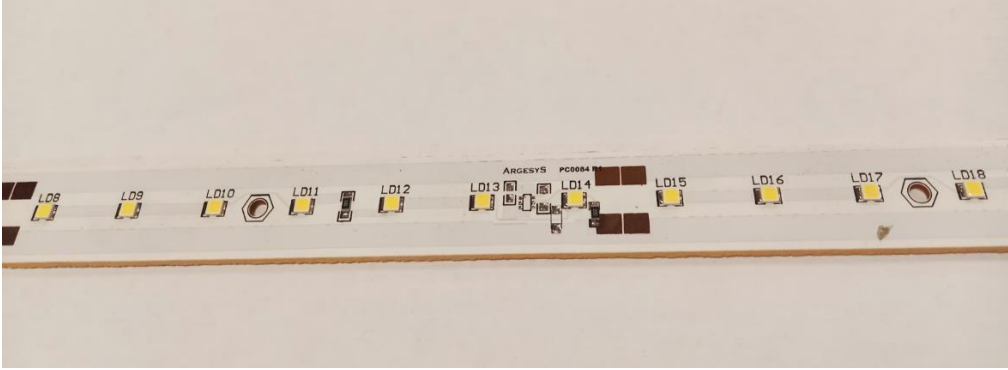

PRODUCT DESCRIPTION

The product boasts high luminous efficiency and long lifespan, ensuring durability and reliability

The LED strip is easy to install and has a class III electrical shock protection, ensuring safe usage.

Protection class luminaire IP 20.

Impact strength IK01

LED Linestrip is a modern and versatile linear light source, used for interior lighting, furniture, lightboxes, illuminated signs, and public spaces.

MOUNTING ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	STRIP
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	8W - 10W - 14W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	24VDC / EXTERNAL DRIVER
OPTICS	120°
LUMEN OUTPUT	131LM/W
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF/DALI
DIMENSIONS (MM)	W/H/L:16/2,2/100MM
HOUSING	PVC / RUBBER
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 01
IP	20

PHOTOMETRIC DATA

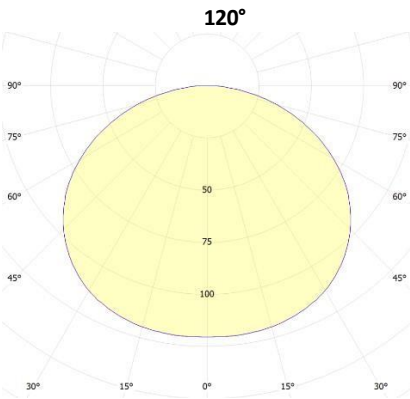

DATASHEET - ALXSYS LIVA TRIMLESS SERIES



IK07

850°



IP 65



A+



PRODUCT DESCRIPTION

Two different size recessed products
Different diameters varying between 55 - 75 mm
High quality aluminum

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Safety class I or class II

High current carrying cable

Protection class luminaire IP 20, 44 or IP65

Impact strength IK07

DALI dimm option, suitable for automation (optional)

3 hours emergency battery kit (optional)

ACCESSORIES







TECHNICAL DATA

MODEL /SIZE	LIVA MINI TRIMLESS	LIVA MIDI TRIMLESS
INTERIOR/EXTERIOR	INTERIOR	
LED	CREE / SAMSUNG / SEOUL	
POWER CONSUMPTION	8W	12W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K	
SDCM	STEP 2-3	
CRI COLOUR RENDERING INDEX	80+	
VOLTAGE	180-265 VAC / EXTERNAL DRIVER	
OPTICS	15° /24° /36° /55°	
LUMEN OUTPUT	100LM/W	
STORAGE TEMPERATURE	-40C / +80C	
OPERATING TEMPERATURE	-40C / +60C	
CONTROL SYSTEM	ON-OFF/DALI, 1-10V, PWM,	
DIMENSIONS (MM)	Ø/H:80/78	Ø/H:108/100
CUT OUT (MM)	Ø:55	Ø:75
HOUSING	EXT ALU	
CABLES	RUBBER	
WARRANTY	5 YEARS	
IK CLASS	IK 07	
IP	20 - 44 - 65	

PHOTOMETRIC DATA

15°24°36°55°



DATASHEET - ALXSYS LIVA SERIES



PRODUCT DESCRIPTION

- Tree different size recessed products
- Different diameters varying between 55 - 95 mm
- High quality aluminum
- With uniform light, perfect light spot and soft lighting
- Recessed ceiling luminaires in indoor areas are ideal for general lighting.
- Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.
- Safety class I or class II
- High current carrying cable
- Protection class luminaire IP 20, 44 or IP65
- Impact strength IK07
- DALI dimm option, suitable for automation (optional)
- 3 hours emergency battery kit (optional)

ACCESSORIES



TECHNICAL DATA

MODEL /SIZE	LIVA MINI	LIVA MIDI	LIVA MAXI
INTERIOR/EXTERIOR	INTERIOR		
LED	CREE / SAMSUNG / SEOUL		
POWER CONSUMPTION	8W	12W	15W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K		
SDCM	STEP 2-3		
CRI COLOUR RENDERING INDEX	80+		
VOLTAGE	180-265 VAC / EXTERNAL DRIVER		
OPTICS	15° /24° /36° /55°		
LUMEN OUTPUT	100LM/W		
STORAGE TEMPERATURE	-40C / +80C		
OPERATING TEMPERATURE	-40C / +60C		
CONTROL SYSTEM	ON-OFF/DALI, 1-10V, PWM,		
DIMENSIONS (MM)	Ø/H:65/78	Ø/H:85/100	Ø/H:105/108
CUT OUT (MM)	Ø:55	Ø:75	Ø:95
HOUSING	EXT ALU		
CABLES	RUBBER		
WARRANTY	5 YEARS		
IK CLASS	IK 07		
IP	20 - 44 - 65		





PHOTOMETRIC DATA

15°

24°

36°

55°



DATASHEET - ALXSYS PRO SERIES



IK07

850°



IP20



A+



PRODUCT DESCRIPTION

Tree different size recessed products. 30 Deg adjustable lighting angle

Different diameters varying between 55 - 95 mm

High quality aluminum

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Safety class I or class II

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

DALI dimm option, suitable for automation (optional)

3 hours emergency battery kit (optional)

ACCESSORIES



TECHNICAL DATA

MODEL /SIZE	PRO 55	PRO 75	PRO 95
INTERIOR/EXTERIOR	INTERIOR		
LED	CREE / SAMSUNG / SEOUL		
POWER CONSUMPTION	10W	13W	20W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K		
SDCM	STEP 2-3		
CRI COLOUR RENDERING INDEX	80+		
VOLTAGE	180-265 VAC / EXTERNAL DRIVER		
OPTICS	15° /24° /36° /55°		
LUMEN OUTPUT	100LM/W		
STORAGE TEMPERATURE	-40C / +80C		
OPERATING TEMPERATURE	-40C / +60C		
CONTROL SYSTEM	ON-OFF/DALI, 1-10V, PWM,		
DIMENSIONS (MM)	Ø/H:65/75	Ø/H:85/81	Ø/H:105/95
CUT OUT (MM)	Ø:55	Ø:75	Ø:95
HOUSING	EXT ALU		
CABLES	RUBBER		
WARRANTY	5 YEARS		
IK CLASS	IK 07		
IP	20		





PHOTOMETRIC DATA

15°

24°

36°

55°



DATASHEET - ALXSYS DEEP SERIES



IK07


850°



IP20



A+



PRODUCT DESCRIPTION

Five different size recessed products.

Different diameters varying between 75 - 175 mm

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Safety class I or class II

High current carrying cable

Protection class luminaire IP 20 or IP 44.

Impact strength IK07

DALI dimm option, suitable for automation (optional)

3 hours emergency battery kit (optional)

ACCESSORIES




*No accessories


TECHNICAL DATA

MODEL /SIZE	DEEP 2.5"	DEEP 4"	DEEP 5"	DEEP 6"	DEEP 7"
INTERIOR/EXTERIOR	INTERIOR				
LED	CREE / SAMSUNG / SEOUL				
POWER CONSUMPTION	7W	10W	15W	24W	35W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K				
SDCM	STEP 2-3				
CRI COLOUR RENDERING INDEX	80+				
VOLTAGE	180-265 VAC / EXTERNAL DRIVER				
OPTICS	30° / 45°				
LUMEN OUTPUT	100LM/W				
STORAGE TEMPERATURE	-40C / +80C				
OPERATING TEMPERATURE	- 40C / +60C				
CONTROL SYSTEM	ON-OFF/DALI				
DIMENSIONS (MM) Ø/H:	87/65	110/75	135/95	160/109	186/121
CUT OUT (MM)	Ø:75	Ø:100	Ø:125	Ø:150	Ø:175
HOUSING	EXT ALU				
CABLES	RUBBER				
WARRANTY	5 YEARS				
IK CLASS	IK 07				
IP	20 - 44				

PHOTOMETRIC DATA

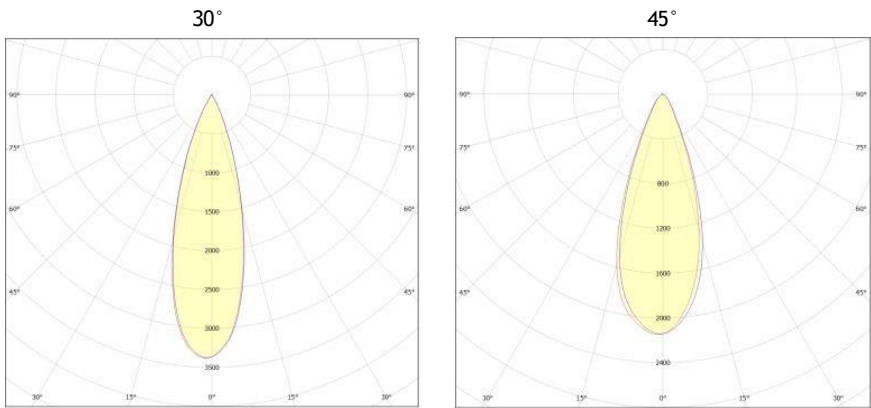

DATASHEET - ALXSYS POWER SERIES

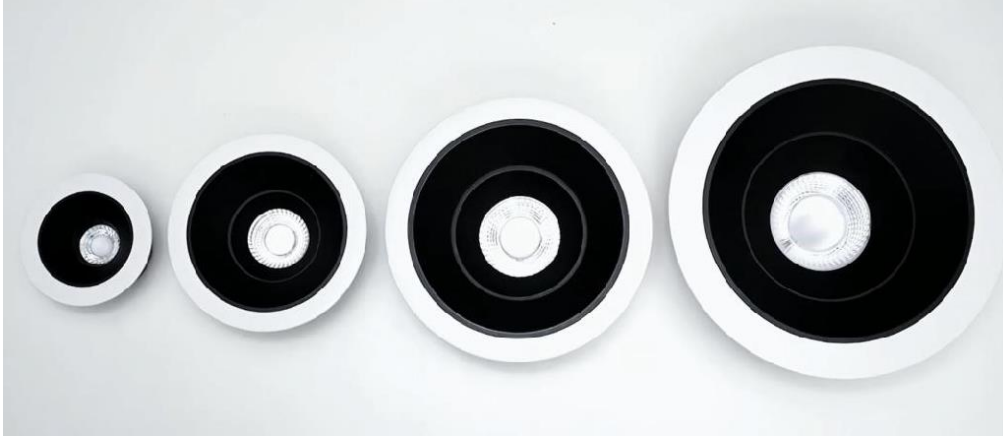

PRODUCT DESCRIPTION

Four different size recessed products.

Different diameters varying between 75 - 190 mm

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Safety class I or class II

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

DALI dimm option, suitable for automation (optional)

3 hours emergency battery kit (optional)

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	POWER 2.5"	POWER 4"	POWER 6"	POWER 8"
INTERIOR/EXTERIOR	INTERIOR			
LED	CREE / SAMSUNG / SEOUL			
POWER CONSUMPTION	7W	15W	20W	40W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K			
SDCM	STEP 2-3			
CRI COLOUR RENDERING INDEX	80+			
VOLTAGE	180-265 VAC / EXTERNAL DRIVER			
OPTICS	24° / 30° / 50°			
LUMEN OUTPUT	100LM/W			
STORAGE TEMPERATURE	-40C / +80C			
OPERATING TEMPERATURE	-40C / +60C			
CONTROL SYSTEM	ON-OFF/DALI			
DIMENSIONS (MM)	Ø/H:100/60	Ø/H:145/79	Ø/H:190/90	Ø/H:235/102
CUT OUT (MM)	Ø:75	Ø:120	Ø:160	Ø:190
HOUSING	EXT ALU			
CABLES	RUBBER			
WARRANTY	5 YEARS			
IK CLASS	IK 07			
IP	20			

PHOTOMETRIC DATA

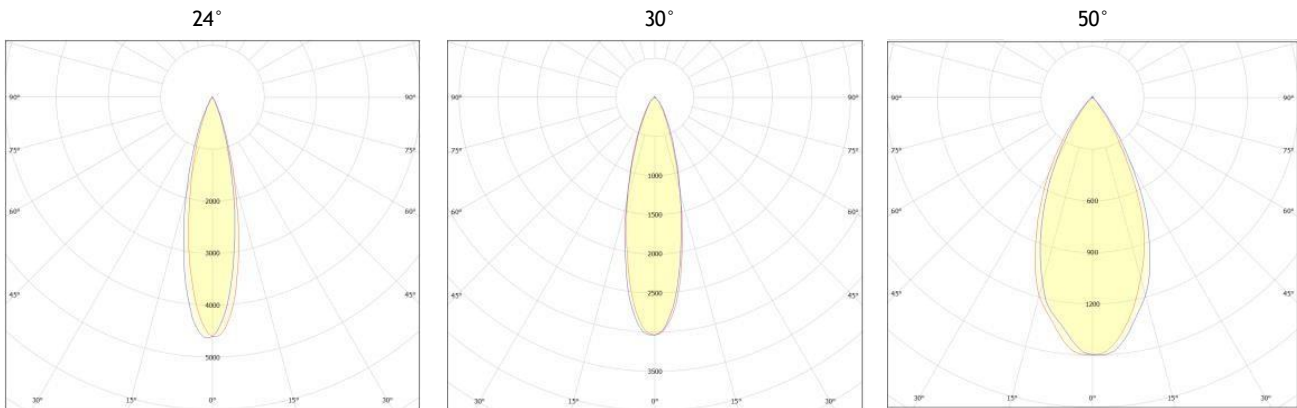

DATASHEET - ALXSYS LUKE



IK10

850°



IP 65



A+



PRODUCT DESCRIPTION

Easy electrical and mechanical installation.

LUKE LED luminaires are a type of lighting produced with LED technology that can be used outdoors and in harsh weather conditions.

LUKE luminaires are resistant to water and dust, and thus continue to work safely in outdoor conditions.

Led waterproof luminaires, produced in various sizes and power levels, have high durability.

They are not affected by humid environments or external factors such as dust.

Their advantageous features include lower energy consumption and longer life compared to traditional lighting systems.

ACCESSORIES




*No accessories



TECHNICAL DATA

MODEL /SIZE	LUKE
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	20W - 40W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 - 265 VAC
OPTICS	120°
LUMEN OUTPUT	2240-4480 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI
DIMENSIONS (MM)	W/H/L: 55/65/600-1200
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	65

PHOTOMETRIC DATA

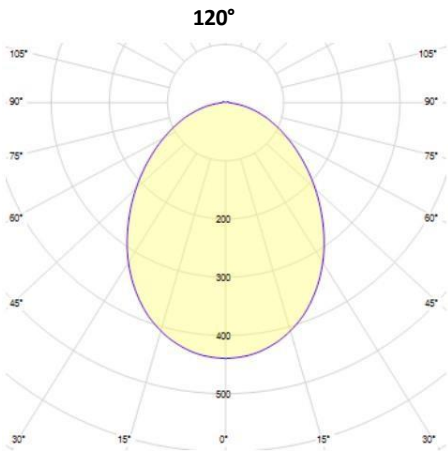

DATASHEET – ALXSYS LUNA

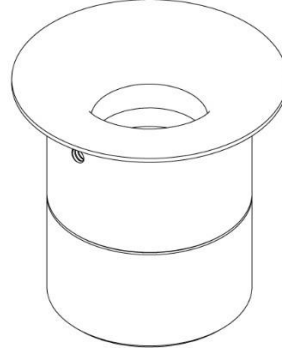

PRODUCT DESCRIPTION

High quality aluminum

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Recessed ceiling luminaires achieve their full potential when used in conjunction with light and building control systems.

Safety class I

High current carrying cable

Protection class luminaire IP 40

Impact strength IK07

Effective thermal design

It is suitable for recessed mounting.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL / SIZE	LUNA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	40°
LUMEN OUTPUT	300LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/H:47/45MM
CUT OUT (MM)	Ø:38MM
HOUSING	EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	40

PHOTOMETRIC DATA

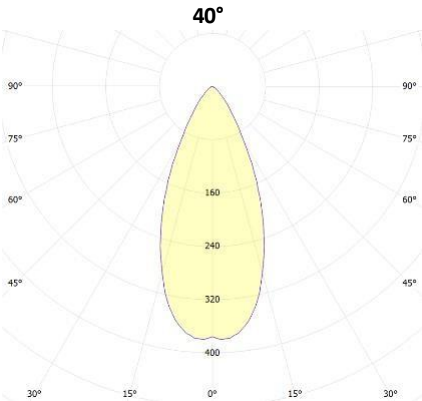

DATASHEET - ALXSYS METHAN





IK07

850°



IP20

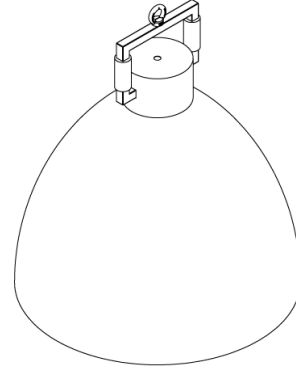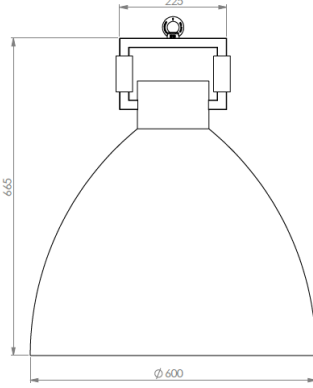

PRODUCT DESCRIPTION

Aluminum metal body.

Pendant options for Methan, pendant, surface type.

Safety class I

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

Often applied to: office, dining table, kitchen or conference table.

MOUNTING ACCESSORIES




*No accessories




TECHNICAL DATA

MODEL /SIZE	METHAN
INTERIOR/EXTERIOR	INTERIOR
LED	LED BULB
POWER CONSUMPTION	10W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC
OPTICS	90°
LUMEN OUTPUT	850LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/H:600/665MM
HOUSING	PLASTING ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	20

PHOTOMETRIC DATA

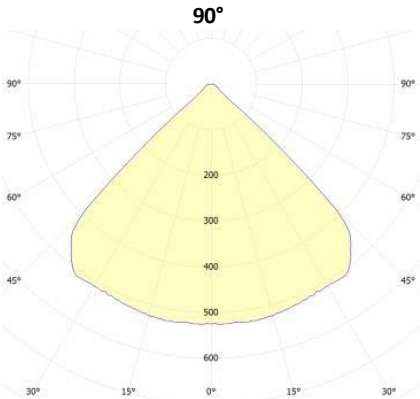

DATASHEET - ALXSYS MISRA RGBW

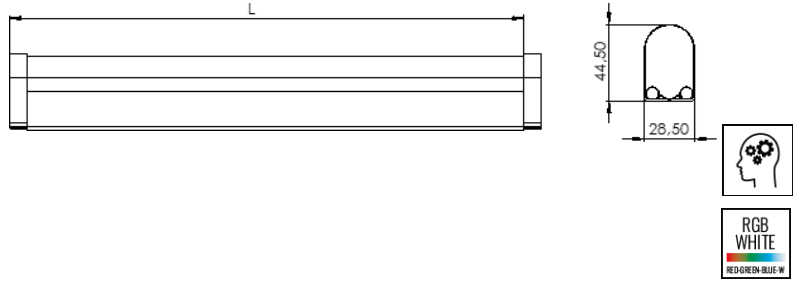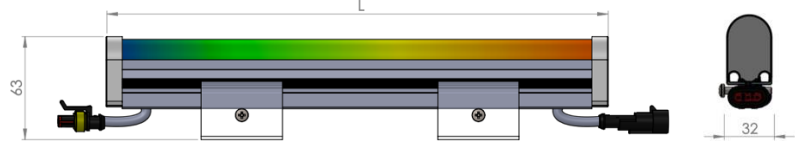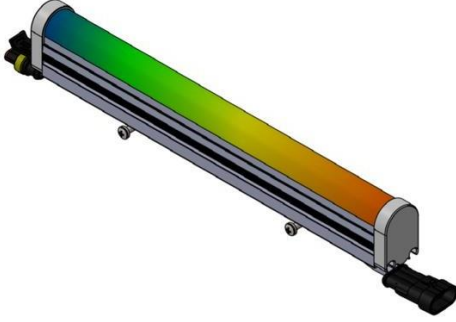

PRODUCT DESCRIPTION

The product boasts high luminous efficiency and long lifespan, ensuring durability and reliability.

Thanks to the opal diffuser, there is no direct ray or glare in the luminaire.

The tube light emits 120 degrees and RGBW color changeable

Suitable for outdoor use.

Safety class II


Protection class luminaire IP 67.

Impact strength IK07

*Using remote control design, you can change the light color and light mode switch via remote control.

Different lighting modes and color options make it ideal for a variety of applications, including accent lighting, ambient lighting, and task lighting.

MOUNTING ACCESSORIES

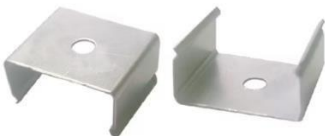


* LED profile mounting bracket

TECHNICAL DATA

MODEL /SIZE	MISRA BP RGBW
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG
POWER CONSUMPTION	15W/MT - 20PIXEL / MT
LED COLOUR (FCCT)	RGBW
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	24VDC / EXTERNAL DRIVER
OPTICS	120°
LUMEN OUTPUT	1400LM/MT
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	DMX / TTL
DIMENSIONS (MM) W/H/L:	W/H/L 44,5X28,5X1000MM
HOUSING	POLYCARBONATE/ PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	67
NOTE	EACH LED MODULE IS 5CM.

PHOTOMETRIC DATA

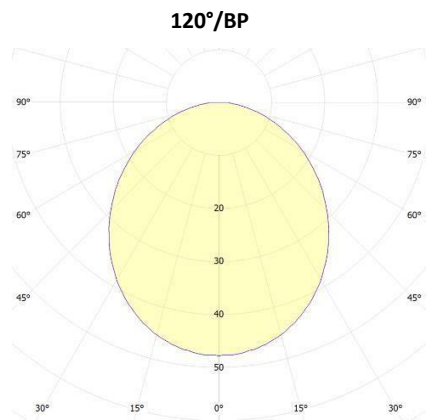

DATASHEET - ALXSYS MISRA




IK07


850°




IP67

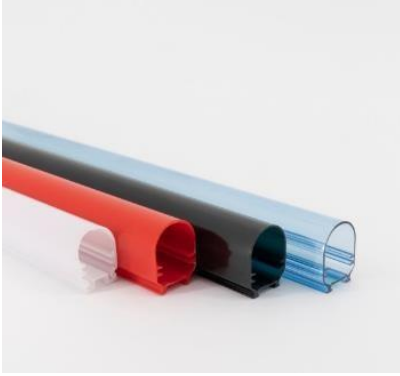

MISRA-BP




MISRA-KP



PRODUCT DESCRIPTION

The product boasts high luminous efficiency and long lifespan, ensuring durability and reliability. Thanks to the opal diffuser, there is no direct ray or glare in the luminaire. Suitable for outdoor use. Safety class II. Protection class luminaire IP 67. Impact strength IK07.

MOUNTING ACCESSORIES




* LED profile mounting bracket

TECHNICAL DATA

MODEL /SIZE	MISRA BP	MISRA KP
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	
LED	CREE / SAMSUNG / SEOUL	
POWER CONSUMPTION	5W/MT - 12W/MT (OPT.)	5W/MT - 12W/MT (OPT.)
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K	
SDCM	STEP 2-3	
CRI COLOUR RENDERING INDEX	80+	
VOLTAGE	24VDC / EXTERNAL DRIVER	
OPTICS	120°	
LUMEN OUTPUT	650LM/MT - 1440LM/MT	650LM/MT - 1440LM/MT
STORAGE TEMPERATURE	-40C / +80C	
OPERATING TEMPERATURE	-40C / +60C	
CONTROL SYSTEM	ON-OFF/DALI	
DIMENSIONS (MM) W/H/L:	21,5/30MM	17,10/12,5MM
HOUSING	POLYCARBONATE/ PMMA	
CABLES	RUBBER	
WARRANTY	5 YEARS	
IK CLASS	IK 07	
IP	67	

PHOTOMETRIC DATA

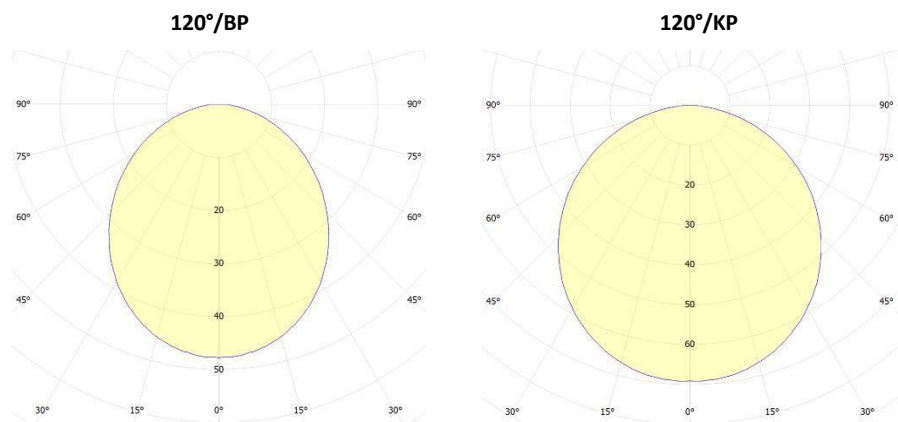

DATASHEET – ALXSYS MONA



IK10


850°



IP 65



A+



PRODUCT DESCRIPTION

- Electrostatic powder coated aluminum body.
- This small LED spotlight is an adjustable light.
- Safety class II
- Weatherproof and durable silicone rubber gasket.
- Stainless steel fittings.
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 65.
- Impact strength IK10
- All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL / SIZE	MONA
INTERIOR/EXTERIOR	EXTERIOR
LED	CREE / SAMSUNG
POWER CONSUMPTION	7W - 10W
LED COLOUR (FCCT)	2700K-3000K-4000K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 - 265 VAC
OPTICS	40°
LUMEN OUTPUT	650LM - 950 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/H: 102/155 MM
HOUSING	DIE ALU, EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	65

PHOTOMETRIC DATA

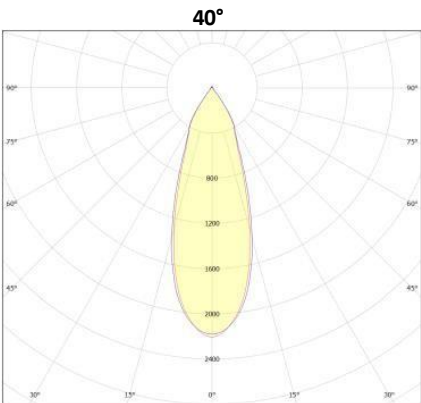

DATASHEET - ALXSYS NANO



IK10



850°



IP67



A+

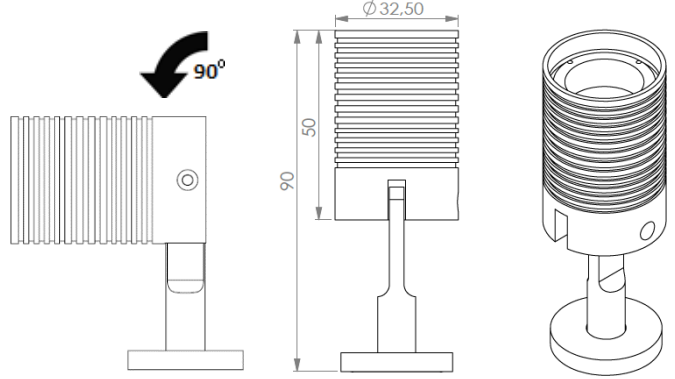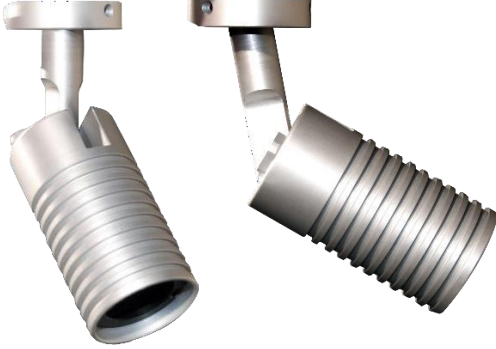

PRODUCT DESCRIPTION

- 100% Full cast aluminum body
- Adjustable type outdoor spotlight
- Spotlight luminaire intended for use with LED light sources.
- Safety class II
- Clear toughened glass
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67
- Impact strength IK10
- All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories


TECHNICAL
DATA

MODEL /SIZE	NANO
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
OPTICS	15° , 35° , 20X40°
LUMEN OUTPUT	276LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/H:32,5/90MM
HOUSING	EXT ALU, TEMPERED GLASS
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	67

PHOTOMETRIC DATA

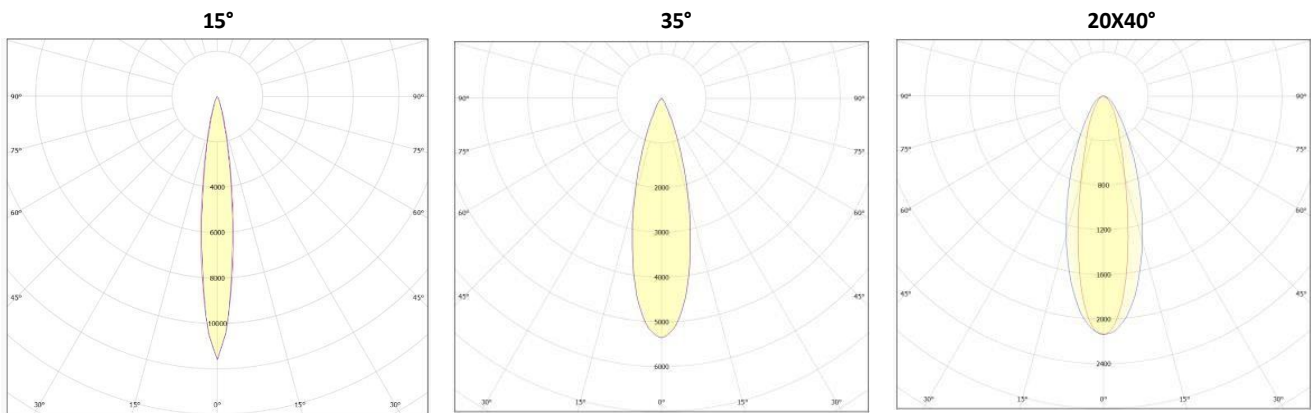

DATASHEET - ALXSYS NAZ



PRODUCT DESCRIPTION

- Electrostatic powder coated sheet metal body.
- Opal diffuser with homogeneous light distribution.
- High lumen output
- Low power consumption
- Safety class II
- Watertight silicon rubber gasket
- High current carrying cable
- Protection class luminaire IP 40.
- Impact strength IK07
- All external screws used are in A2 stainless steel.
- Flex and plug
- 3-hour emergency battery kit for built-in products (optional).

ACCESSORIES




*No accessories



TECHNICAL DATA

MODEL /SIZE	NAZ 4"	NAZ 6"	NAZ 8"
INTERIOR/EXTERIOR	INTERIOR		
LED	CR EE / SAMSUNG / SEOUL		
POWER CONSUMPTION	12W	18W	24W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K		
SDCM	STEP 2-3		
CRI COLOUR RENDERING INDEX	80+		
VOLTAGE	180 – 265 VAC		
OPTICS	120°		
LUMEN OUTPUT	12W	18W	24W
STORAGE TEMPERATURE	-40C / +80C		
OPERATING TEMPERATURE	-40C / +60C		
CONTROL SYSTEM	ON-OFF / DALI		
DIMENSIONS Ø/H(MM)	130/32MM	178/32MM	225/32MM
CUT OUT (MM)	110MM	158MM	205MM
HOUSING	DIE ALU, PMMA		
CABLES	RUBBER		
WARRANTY	5 YEARS		
IK CLASS	IK 07		
IP	40		

PHOTOMETRIC DATA

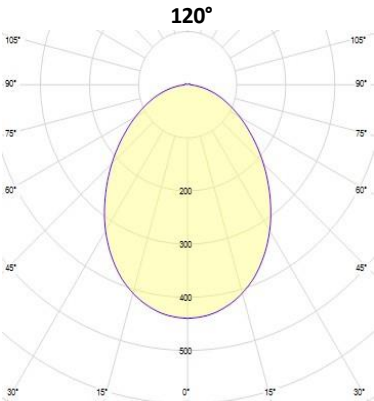

DATASHEET - ALXSYS PEGGY



PRODUCT DESCRIPTION

Electrostatic powder coated aluminum body.

Landscape fixture.

Plexi diffuser, different color options LED light source

Safety class II

Weatherproof and durable silicone rubber gasket.

Stainless steel fittings.

High current carrying cable

Protection class luminaire IP 65.

Impact strength IK10

All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	PEGGY
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	10W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 - 265 VAC
OPTICS	ASYM
LUMEN OUTPUT	850LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI
DIMENSIONS (MM)	W/H/L: 120/152/554MM
HOUSING	EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	65

PHOTOMETRIC DATA

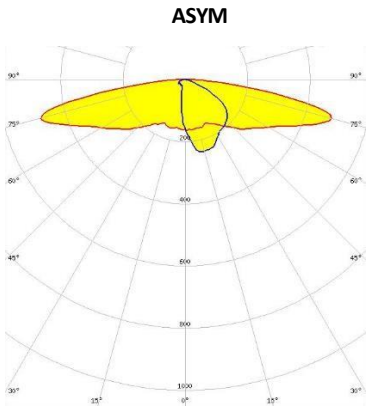

DATASHEET - ALXSYS REA



IK07


850°



IP67



A+

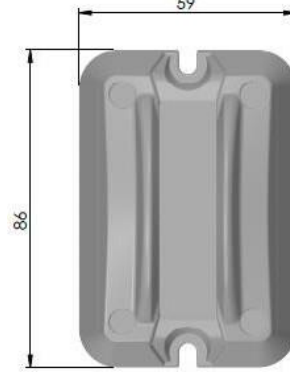

PRODUCT DESCRIPTION

- Wall-mounted version.
- Consists of screen and supporting base.
- Version built-in power supply.
- Available in 180° optic.
- Compatible with lighting management systems.
- They are making them weatherproof and suitable for outdoor use.
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67.
- Impact strength IK07
- All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	REA
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 - 265 VAC
OPTICS	180°
LUMEN OUTPUT	200LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	W/H: 86/59MM
HOUSING	DIE ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	67

PHOTOMETRIC DATA

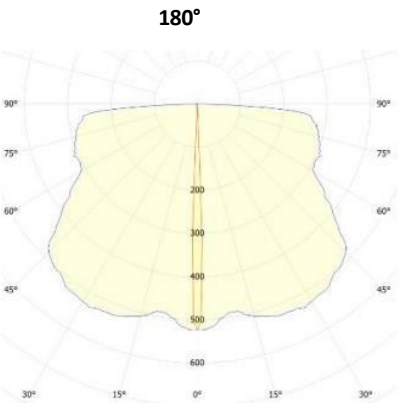

DATASHEET - ALXSYS RONA



PRODUCT DESCRIPTION

High quality aluminum

With uniform light, perfect light spot and soft lighting.

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Safety class II

Weatherproof and durable silicone rubber gasket.

Stainless steel fittings.

High current carrying cable

Protection class luminaire IP 65.

Impact strength IK07.

All external screws used are in A2 stainless steel.

It is suitable for recessed mounting.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	RONA
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	25W
LED COLOUR (FCCT)	3000K-4000K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180 – 265 VAC
OPTICS	DIFFUSE 120°
LUMEN OUTPUT	2200LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI
DIMENSIONS (MM)	Ø:118MM H:132MM
CUT OUT (MM)	Ø:110MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	65

PHOTOMETRIC DATA

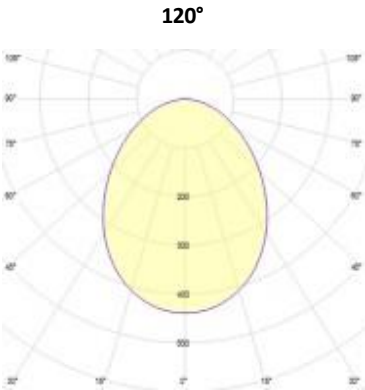

DATASHEET - ALXSYS ROSE



PRODUCT DESCRIPTION

Corrosion resistant stainless-steel housing

Ground recessed mountable.

This luminaire provides a practical solution for all inground lighting applications including pathways, driveways, courtyards, and decks.

Safety class III

Tempered safety glass

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 67. IP68 air vent.

Impact strength IK10

All external screws used are in A2 stainless steel.

MOUNTING ACCESSORIES

*Recessed box

*Watertight connector




*Honeycomb


TECHNICAL DATA

MODEL /SIZE	ROSE 1	ROSE 2	ROSE 3
INTERIOR/EXTERIOR	IN TERIOR / EXTERIOR		
LED	CREE / SAMSUNG / SEOUL		
POWER CONSUMPTION	5W	8W	12W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K		
SDCM	STEP 2-3		
CRI COLOUR RENDERING INDEX	80+		
VOLTAGE	180-265 VAC /EXTERNAL DRIVER		
OPTICS	85°		
LUMEN OUTPUT	450LM	800LM	1200LM
STORAGE TEMPERATURE	-40C / +80C		
OPERATING TEMPERATURE	-40C / +60C		
CONTROL SYSTEM	ON-OFF / DALI (EXTERNAL DRIVER)		
DIMENSIONS (MM)	Ø:55 /H:50MM	Ø:99 /H:54MM	Ø:160 /H:95MM
CUT OUT (MM)	Ø:45MM	Ø:90MM	Ø:140MM
HOUSING	EXT ALU, UV STABILIZED PMMA		
CABLES	RUBBER		
WARRANTY	5 YEARS		
IK CLASS	IK 10		
IP	67		

PHOTOMETRIC DATA

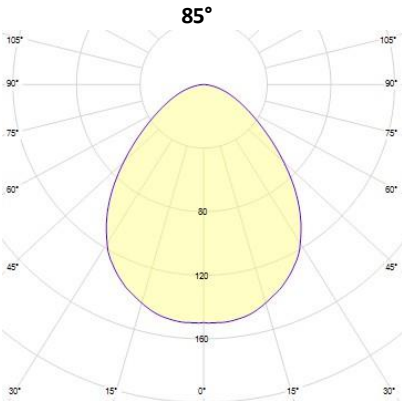

DATASHEET - ALXSYS SIERRA

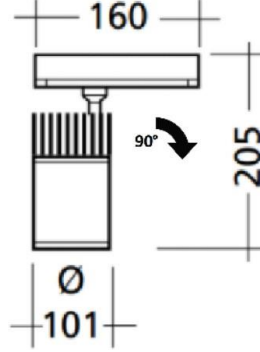

PRODUCT DESCRIPTION

Aluminium die cast body with electrostatic powder coated.

LIMA LED track spotlights bring flexible light into architecture: movability is their most important feature. Track spotlights contribute to application-related, effective and sustainable lighting: light only reaches where it is needed and seen.

Clear glass with high light transmittance.

Safety class I

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

Low energy consumption, high efficiency. Long life.

It is suitable surface track mounting.

Shock and vibration resistant construction.

MOUNTING ACCESSORIES




*Spotlight for phase track. (1 Meter or 2 Meter)

TECHNICAL DATA

MODEL /SIZE	SIERRA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	20W - 30W - 40W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC
OPTICS	15° , 30 ° , 45° , 60 °
LUMEN OUTPUT	2280LM - 3680LM - 4400LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/H:101/205MM
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	20

PHOTOMETRIC DATA

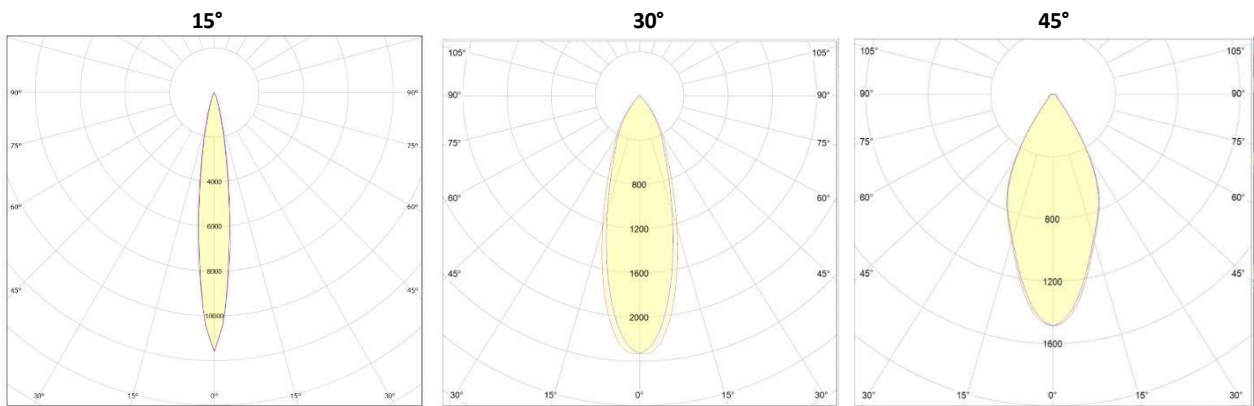

DATASHEET - ALXSYS SNAIL



IK07


850°



IP44



A+

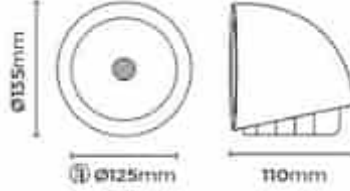

PRODUCT DESCRIPTION

With uniform light, perfect light spot and soft lighting

Recessed ceiling luminaires in indoor areas are ideal for general lighting.

Thanks to their downward-directed light, they are also suitable for accentuating prominent areas such as entrances.

Recessed ceiling luminaires achieve their full potential when used in conjunction with light and building control systems.

Safety class I

High current carrying cable

Protection class luminaire IP 20 or IP44

Impact strength IK07

It is suitable for recessed mounting.

ACCESSORIES




TECHNICAL

DATA

MODEL / SIZE	SNAIL 20	SNAIL 28
INTERIOR/EXTERIOR	INTERIOR	
LED	CREE / SAMSUNG / SEOUL	
POWER CONSUMPTION	20W	28W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K	
SDCM	STEP 2-3	
CRI COLOUR RENDERING INDEX	80+	
VOLTAGE	180-265 VAC / EXTERNAL DRIVER	
OPTICS	120°	
LUMEN OUTPUT	500LM - 880 LM	
STORAGE TEMPERATURE	-40C / +80C	
OPERATING TEMPERATURE	-40C / +60C	
CONTROL SYSTEM	ON-OFF	
DIMENSIONS (MM)	L/H: 135/110MM	L/H: 190/165MM
CUT OUT (MM)	Ø:125mm	Ø:165MM
HOUSING	DIE ALU, EXT ALU	
CABLES	RUBBER	
WARRANTY	5 YEARS	
IK CLASS	IK 07	
IP	20 / 44	

PHOTOMETRIC DATA

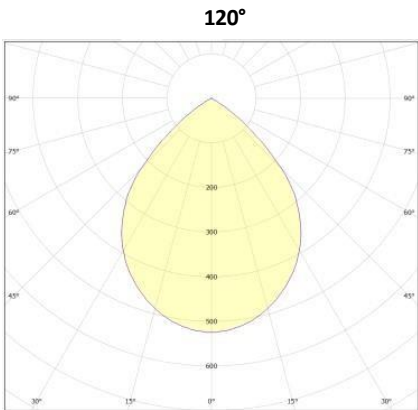

DATASHEET - ALXSYS STREET L



IK10


850°



IP 66



A+

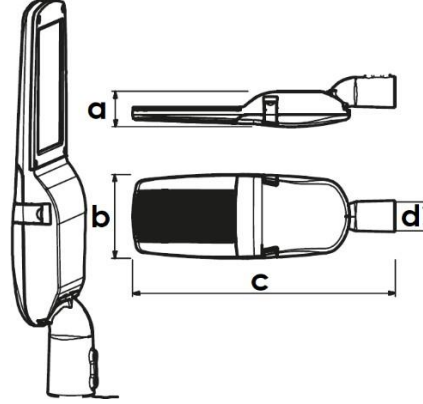

PRODUCT DESCRIPTION

STREET-L street light meets your street lighting needs with its modern design, high performance and energy efficiency.

It provides optimal visibility on the streets with its powerful light flow and wide coverage area.

It illuminates your streets in a modern, safe and energy-efficient way thanks to its durable and easy-to-install features.

STREET-L street light is an ideal option that combines aesthetics and efficiency.

Safety class II

High current carrying cable

Protected against splash water

Protection class luminaire IP 66. IP68 air vent.

Impact strength IK10

All external screws used are in A2 stainless steel.


ACCESSORIES

* Universal mounting joint.


TECHNICAL DATA

MODEL /SIZE	STREET L 60	STREET L 80	STREET L 100	STREET L 120
INTERIOR/EXTERIOR	EXTERIOR			
LED	SAMSUNG			
POWER CONSUMPTION	60W	80W	100W	120W
LED COLOUR (FCCT)	3000K-4000K-6500K			
SDCM	STEP 2-3			
CRI COLOUR RENDERING INDEX	70+			
VOLTAGE	180-265 VAC			
OPTICS	ASYM			
LUMEN OUTPUT	6900LM	9100LM	11200LM	13000LM
STORAGE TEMPERATURE	-40C / +80C			
OPERATING TEMPERATURE	-40C / +60C			
CONTROL SYSTEM	ON-OFF / DALI			
DIMENSIONS W/H/L(MM)	630X200X80MM			
HOUSING	DIE ALU, TEMPERED GLASS			
CABLES	RUBBER			
WARRANTY	5 YEARS			
IK CLASS	IK 10			
IP	66			

PHOTOMETRIC DATA

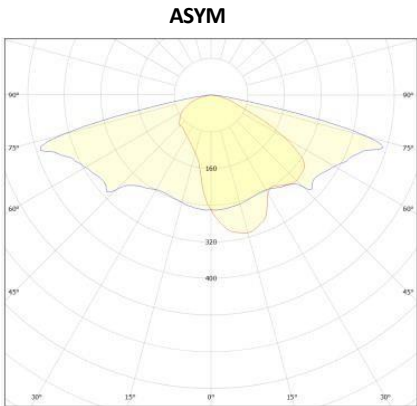

DATASHEET - ALXSYS STREET S

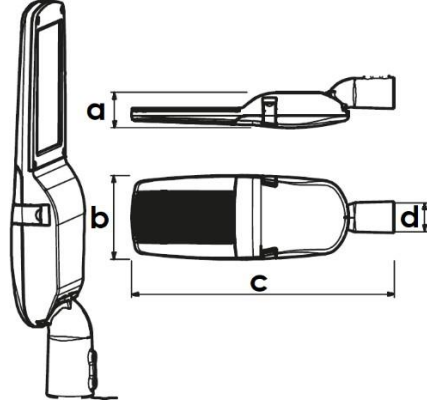

PRODUCT DESCRIPTION

STREET-L street light meets your street lighting needs with its modern design, high performance and energy efficiency.

It provides optimal visibility on the streets with its powerful light flow and wide coverage area.

It illuminates your streets in a modern, safe and energy-efficient way thanks to its durable and easy-to-install features.

STREET-L street light is an ideal option that combines aesthetics and efficiency.

Safety class II

High current carrying cable

Protected against splash water

Protection class luminaire IP 66. IP68 air vent.

Impact strength IK10

All external screws used are in A2 stainless steel.


ACCESSORIES

* Universal mounting joint.



TECHNICAL DATA

MODEL /SIZE	STREET S 40	STREET S 65	STREET S 75	STREET S 80
INTERIOR/EXTERIOR	EXTERIOR			
LED	SAMSUNG			
POWER CONSUMPTION	40W	65W	75W	80W
LED COLOUR (FCCT)	3000K-4000K-6500K			
SDCM	STEP 2-3			
CRI COLOUR RENDERING INDEX	70+			
VOLTAGE	180-265 VAC			
OPTICS	ASYM			
LUMEN OUTPUT	4600LM	6500LM	7800LM	9100LM
STORAGE TEMPERATURE	-40C / +80C			
OPERATING TEMPERATURE	-40C / +60C			
CONTROL SYSTEM	ON-OFF / DALI			
DIMENSIONS W/H/L(MM)	520X200X80MM			
HOUSING	DIE ALU, TEMPERED GLASS			
CABLES	RUBBER			
WARRANTY	5 YEARS			
IK CLASS	IK 10			
IP	66			

PHOTOMETRIC DATA

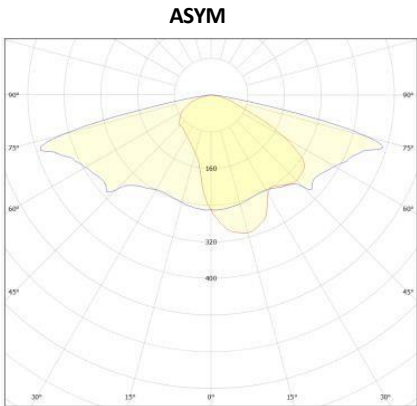

DATASHEET - ALXSYS TALI



PRODUCT DESCRIPTION

Corrosion resistant stainless-steel housing

Ground recessed mountable.

It is suitable for lighting in various scenes, compact and does not take up space.

Safety class III

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 67. IP68 air vent.

Impact strength IK10

All external screws used are in A2 stainless steel.

It is recommended to light from the middle to the edge of the road in multi-directional openings.

MOUNTING ACCESSORIES




*Plastic case for Tali

TECHNICAL DATA

MODEL /SIZE	TALI
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3W - 7W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	12-24VDC
OPTICS	135°
LUMEN OUTPUT	180LM - 400 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF / DALI / 1-10V
DIMENSIONS (MM)	Ø/H: 110/74MM
CUT OUT (MM)	Ø:98MM
HOUSING	DIA ALU, PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	67

PHOTOMETRIC DATA

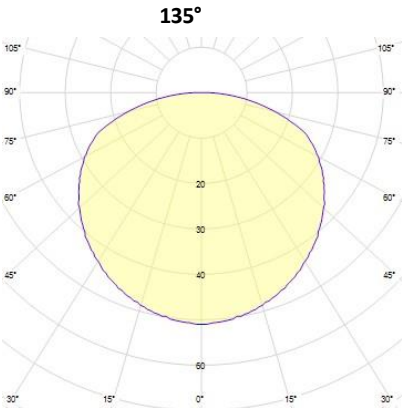

DATASHEET - ALXSYS TERRA



IK10


850°



IP67



A+

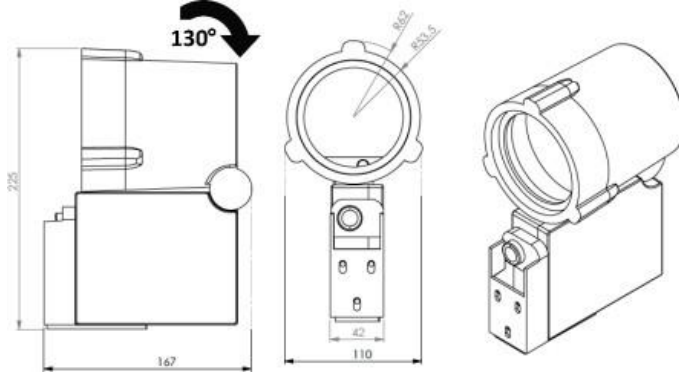

PRODUCT DESCRIPTION

- 100% Full cast aluminum body
- Adjustable type outdoor spotlight
- Spotlight luminaire intended for use with LED light sources.
- Safety class II
- Clear toughened glass
- Watertight silicon rubber gasket
- High current carrying cable
- Protected against splash water
- Protection class luminaire IP 67
- Impact strength IK10
- All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories



TECHNICAL
DATA

MODEL /SIZE	TERRA
INTERIOR/EXTERIOR	EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	20W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-240VAC
OPTICS	15° - 30° - 50°
LUMEN OUTPUT	1840LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/W/H/L: 107/110/225/167MM
HOUSING	DIE ALU, TEMPERED GLASS
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	67

PHOTOMETRIC DATA

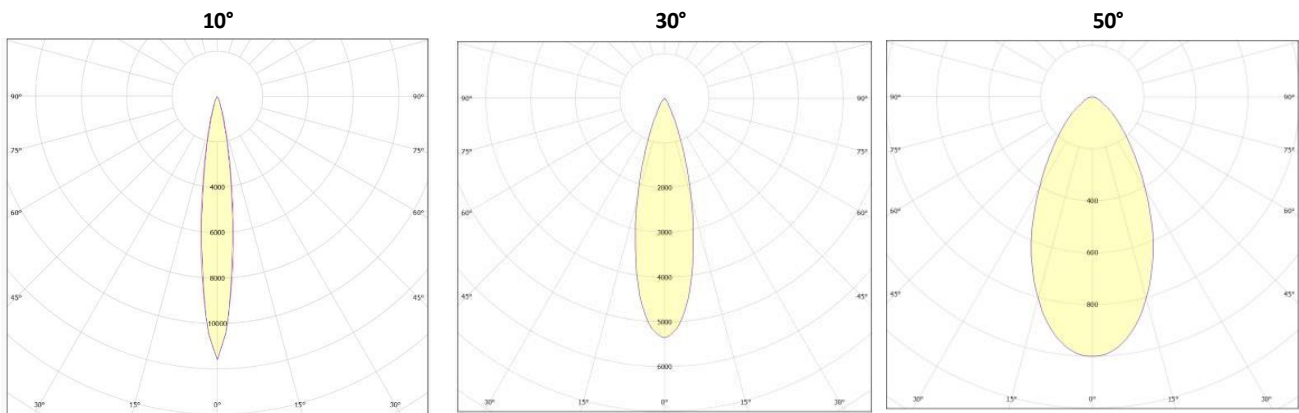

DATASHEET – ALXSYS TINA

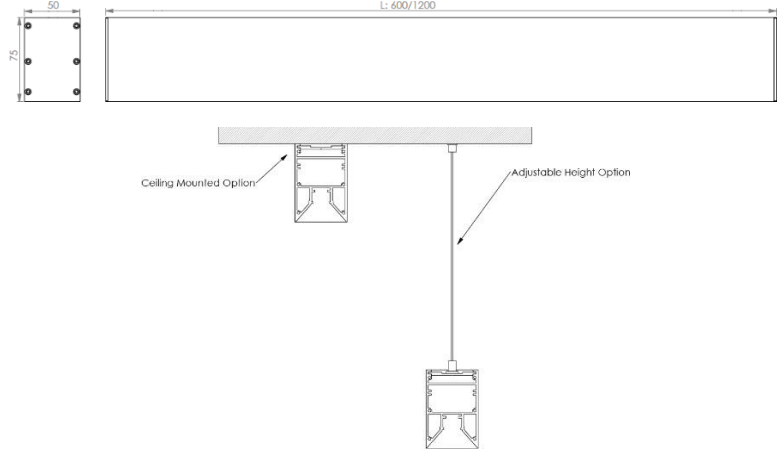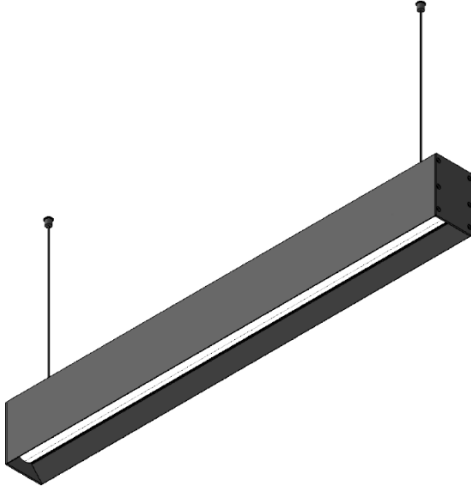

PRODUCT DESCRIPTION

Ideally suited for lighting above a table or in the office.

Available in black and white.

The WILMA pendant lamp has 2 suspension points and are adjustable in height.

Pendant options for WILMA, pendant, surface type.

Safety class I

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

Often applied to: office, dining table, kitchen or conference table.

DALI dim option, suitable for automation (optional)

MOUNTING ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	TINA 600	TINA 1200
INTERIOR/EXTERIOR	INTERIOR	
LED	CREE / SAMSUNG / SEOUL	
POWER CONSUMPTION	20W	40W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K	
SDCM	STEP 2-3	
CRI COLOUR RENDERING INDEX	80+	
VOLTAGE	180-265VAC / INTER NAL DRIVER	
OPTICS	100°	
LUMEN OUTPUT	500LM	1 000LM
STORAGE TEMPERATURE	-40C / +80C	
OPERATING TEMPERATURE	-40C / +60 C	
CONTROL SYSTEM	ON-OFF/DALI	
DIMENSIONS (MM)	W/H/L: 50/75/600	W/H/L: 50/75/1200
HOUSING	EXT ALU, UV STABILIZED PMMA	
CABLES	RUBBER	
WARRANTY	5 YEARS	
IK CLASS	IK 07	
IP	20	

PHOTOMETRIC DATA

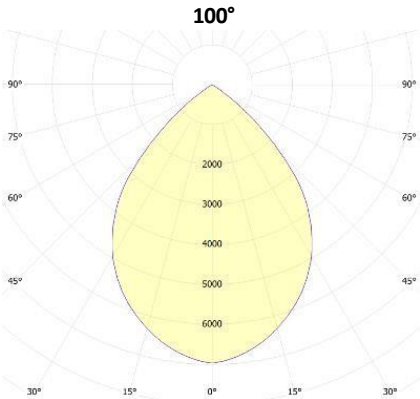

DATASHEET - ALXSYS TONUZ



IK10



850°



IP67



A+

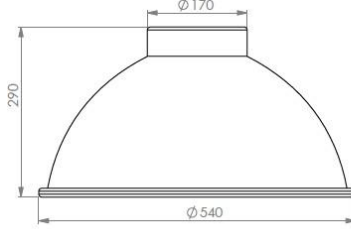

PRODUCT DESCRIPTION

Lighting for circularity.

Safety class II

Clear toughened glass

Watertight silicon rubber gasket

High current carrying cable

Protected against splash water

Protection class luminaire IP 67

Impact strength IK10

All external screws used are in A2 stainless steel.

For gas stations and high ceiling areas.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	TONOZ
INTERIOR/EXTERIOR	EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	75W – 100W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	180-265 VAC
OPTICS	60° ,90°
LUMEN OUTPUT	9000LM - 11500LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø:540/H: 290MM
HOUSING	PLASTING ALU, TEMPERED GLASS
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 10
IP	67

PHOTOMETRIC DATA

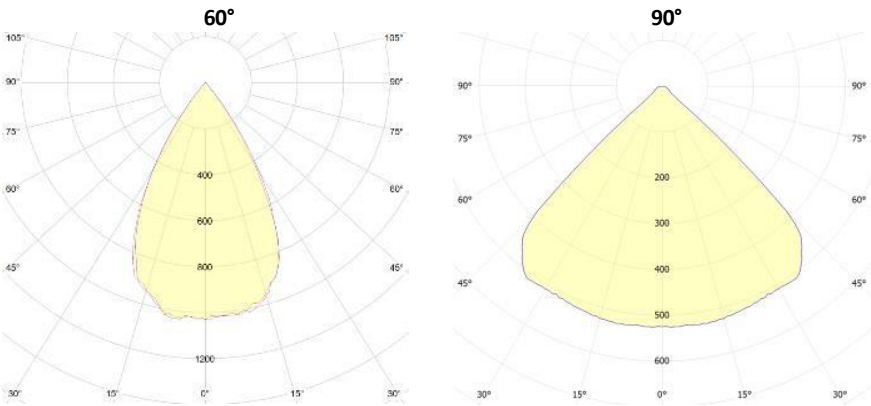

DATASHEET - ALXSYS WILMA





IK07

850°



IP20

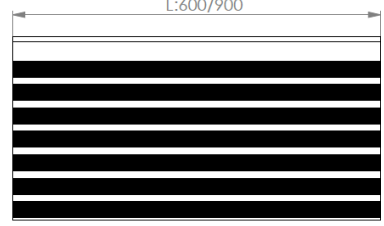

PRODUCT DESCRIPTION

Ideally suited for lighting above a table or in the office.

Available in black and white.

The WILMA pendant lamp has 2 suspension points and are adjustable in height.

Pendant options for WILMA, pendant, surface type.

Safety class I

High current carrying cable

Protection class luminaire IP 20.

Impact strength IK07

Often applied to: office, dining table, kitchen or conference table.

DALI dim option, suitable for automation (optional)

MOUNTING ACCESSORIES




*No accessories



TECHNICAL DATA

MODEL /SIZE	WILMA 600	WILMA 900
INTERIOR/EXTERIOR	INTERIOR	
LED	CREE / SAMSUNG / SEOUL	
POWER CONSUMPTION	20W	40W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K	
SDCM	STEP 2- 3	
CRI COLOUR RENDERING INDEX	80+	
VOLTAGE	180-265 VAC	
OPTICS	90°	
LUMEN OUTPUT	2200LM	4400LM
STORAGE TEMPERATURE	-40C / +80C	
OPERATING TEMPERATURE	-40C / +6 0C	
CONTROL SYSTEM	ON-OFF/DALI	
DIMENSIONS (MM)	W/H/L: 93,5/100/600	W/H/L: 93,5/100/900
HOUSING	EXT ALU, UV STABILIZED PMMA	
CABLES	RUBBER	
WARRANTY	5 YEARS	
IK CLASS	IK 07	
IP	20	

PHOTOMETRIC DATA

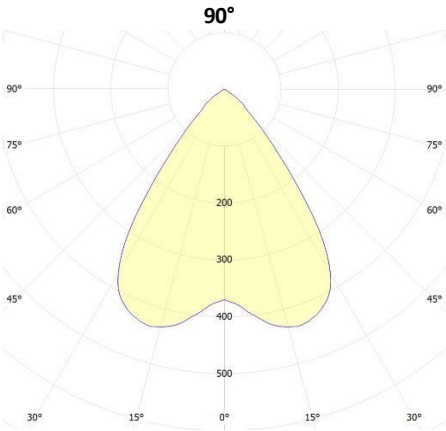

DATASHEET - ALXSYS YUSSI 3

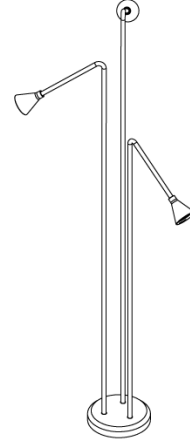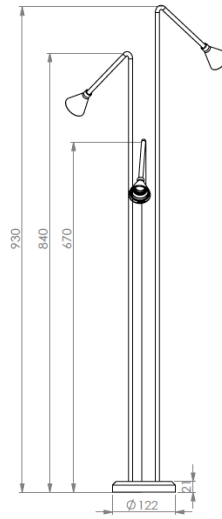

PRODUCT DESCRIPTION

- Electrostatic powder coated aluminum body.
- Landscape fixture.
- Plexi diffuser, different color options LED light source
- Safety class II
- Weatherproof and durable silicone rubber gasket.
- Stainless steel fittings.
- High current carrying cable
- Protection class luminaire IP 65.
- Impact strength IK07.
- All external screws used are in A2 stainless steel.

ACCESSORIES




*No accessories

TECHNICAL DATA

MODEL /SIZE	YUSSI 3
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER CONSUMPTION	3X2W
LED COLOUR (FCCT)	2700K-3000K-4000K-6500K
SDCM	STEP 2-3
CRI COLOUR RENDERING INDEX	80+
VOLTAGE	12-48VDC
OPTICS	90°
LUMEN OUTPUT	550LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL SYSTEM	ON-OFF
DIMENSIONS (MM)	Ø/H: 122/ 670-840-930MM
HOUSING	EXT ALU, DIE ALU, PMMA, ABS
CABLES	RUBBER
WARRANTY	5 YEARS
IK CLASS	IK 07
IP	65

PHOTOMETRIC DATA

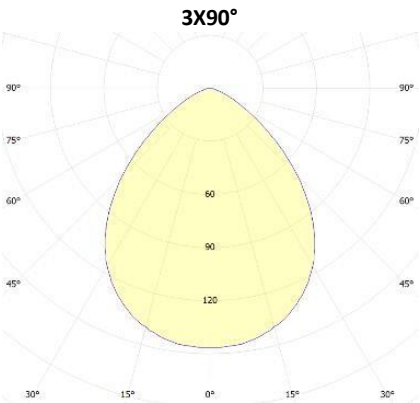

ARGESYS

ELEKTRONİK SANAYİ VE TİCARET A.Ş.

ASYS LIGHT

Şerifali Mah. Mevdudi Sokak. No:48 Ümraniye İstanbul
Tel: 0(216) 499 11 00 Mail: info@argesys.com.tr

www.argesys.com.tr