
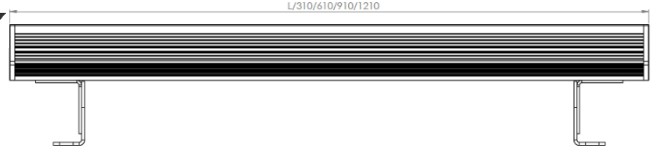
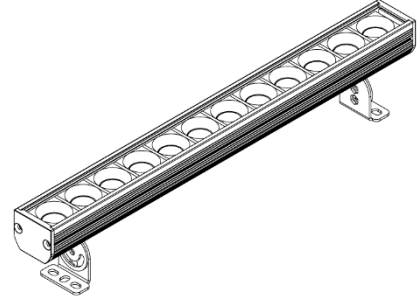


# ARGESYS

ELEKTRONİK SANAYİ VE TİCARET A.Ş.


## ALXSYS EYMEN DATASHEET

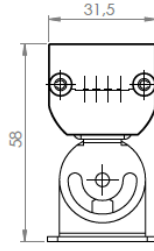


MODEL /SIZE	EYMEN LS32	EYMEN LS62	EYMEN LS92	EYMEN LS122
INTERIOR/EXTERIOR	INTERIOR	INTERIOR	INTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	14W	27W	40W	53W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+	80+	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER	180-265 VAC / EXTERNAL DRIVER	180-265 VAC / EXTERNAL DRIVER	180-265 VAC / EXTERNAL DRIVER
BEAM ANGLE	15°, 25°, 40°, 20x45°	15°, 25°, 40°, 20x45°	15°, 25°, 40°, 20x45°	15°, 25°, 40°, 20x45°
LUMEN OUTPUT	1400LM	2700LM	4000LM	5300LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	W/H/L: 31,5/58/310	W/H/L: 31,5/58/610	W/H/L: 31,5/58/910	W/H/L: 31,5/58/1210
HOUSING	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER	RUBBER	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS	5 YEARS	5 YEARS
IP	40	40	40	40

### GAMMA ANGLES:


15°

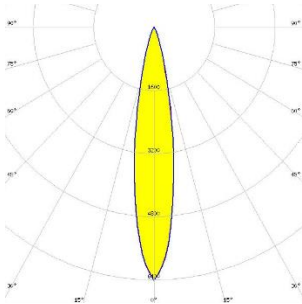

25°

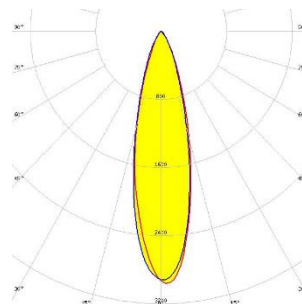

40°



20X45°

